

Size matters, but we've got you covered.




Retrofitting has never been so easy

- The Caxton Downlights are designed to fit most existing holes with cut out sizes ranging from Ø90-210mm
- Spring clips hold the fitting in place and allow for quick and easy installation


Not your average Downlights

- We don't just stock the standard - Emergency, Dimmable and Dimmable Emergency options are all on the shelf ready for Next Day Delivery
- Need Self Test Emergency, or Microwave Sensor? Our range of accessories ensure ultimate flexibility


**TP(A) FLAMMABILITY
RATED DIFFUSER**

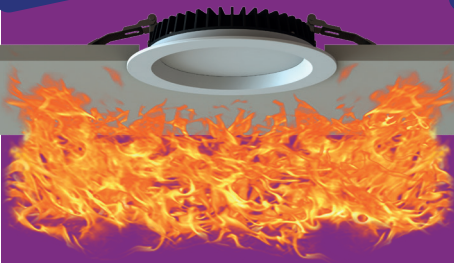

**SELECTABLE COLOUR
TEMPERATURE**

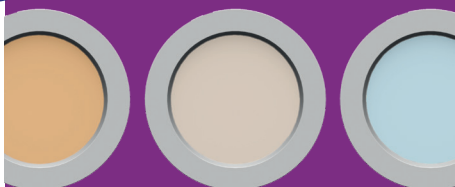

**IP65 RATED
FASCIA**




Technical Specifications

Colour Rendering	>80 CRI
Diffuser Flammability Rating	TP(a)
Driver Output Voltage (DC)	24-43V
Flicker-Free	Yes
Input Voltage (AC)	220-240V
Lamp Viewing Angle	110°
LED Manufacturer	Honglitronic
LED Type	SMD 2835
Luminaire Efficacy	105lm/W
Operating Temp.	0°C to +45°C
Power Factor	>0.5
UGR Rating	More than 19
Driver Manufacturer	Tridonic Advanced Series
Electrical Class	3
Housing Colour	White
Housing Material	Aluminium
Lifespan LM ₈₀	50,000 Hours
Diffuser Material	Glass
Dimmable	Optional upgrade
Manufacturer	CREP Optoelectronics



3" 5W Standard
NET-49-05-70

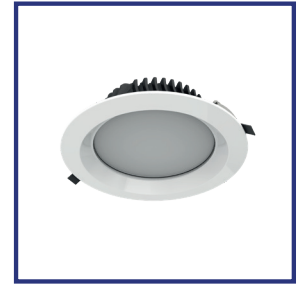

4" 7W Standard
NET-49-05-72



6" 16W Standard
NET-49-05-74



8" 20W Standard
NET-49-05-76

Available in



Emergency



Dimmable & Dimmable Emergency

**We stock them, so
you don't have to!**
Delivery direct to
branch or site.

Order now over at
www.mynetled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY



NET LED
LIGHTING