

## DUXFORD RETROFIT GEAR TRAY 4000K MICROWAVE SENSOR

NET-33-06-07




### Integral Microwave Sensor

Save money and energy by ensuring the fitting only comes on when movement is detected



### Multiple mounting points

Retrofit into existing housings quickly and easily



### Features & Benefits

- Detection range from 2m to 10m
- Hold time from 5 seconds to 10 minutes
- Daylight threshold
- Corridor function 0% or 10%
- Multiple mounting points for retro fit into existing housings
- Quick release Gear Trays

### Key Data

<b>Power</b>	16W
<b>Luminous Flux</b>	1600lm
<b>Colour Temperature</b>	4000K
<b>Dimensions</b>	Ø261 x 23.6mm
<b>Warranty</b>	3 Years

### NET LED Lighting

Buckingway Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	100lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	52
Driver Manufacturer	Merrytek
Driver Output Voltage (DC)	36-42V
Total Circuit Power (W)	16W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	115°
Dimmable	No
Operating Temp.	-15°C to +45°C
Lifespan LM80	35,000 Hours
UGR Rating	More than 19
Weight	0.54Kg
Manufacturer	NET LED Lighting
Sensor IP Rating	IP20
Standby Dimming Level	0% / 10%
Corridor Function	Yes

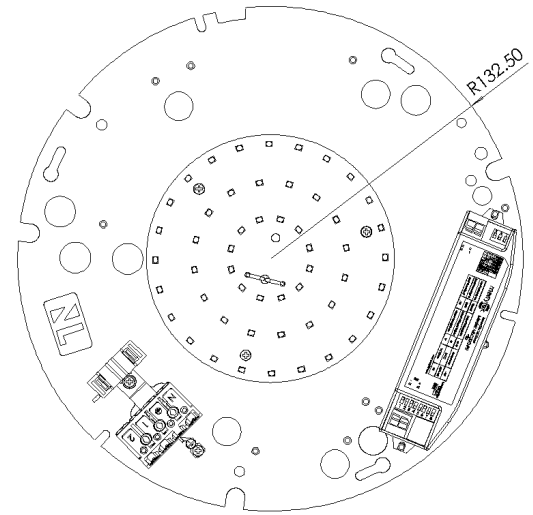

## Other Options

Description	
NET-33-06-03	Duxford Retrofit Gear Tray Multi-Wattage 4000K Standard
NET-33-06-05	Duxford Retrofit Gear Tray Multi-Wattage 4000K Emergency/Self Test
NET-33-06-07	Duxford Retrofit Gear Tray 4000K Microwave Sensor
NET-33-06-09	Duxford Retrofit Gear Tray 4000K Microwave Sensor Emergency/Self Test

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

3K

4K

5.5K

## DUSK TO DAWN FUNCTION

Detects ambient light levels and adjusts the light accordingly

*Photo cell options only*

## PUSH CONNECTOR

Reduce installation time with easy-to-use push fit terminals

## SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 3000K, 4000K or 5500K

## INTEGRAL MICROWAVE SENSOR

Featuring a 0 or 10% Standby Mode, 2-10m detection range and 5sec to 10min hold time

*Microwave Sensor options only*

## MULTIPLE MOUNTING POINTS

Retro fit into existing housings quickly and easily

## MANUAL OR SELF TEST EMERGENCY SELECTABLE

Choose between manual emergency or self test emergency at the time of installation

*Emergency options only*

## MULTI WATTAGE DRIVER

Choose between 12W, 14W, 16W or 18W at the time of installation

*NOT on Microwave Sensor options*