


Designed for versatility.

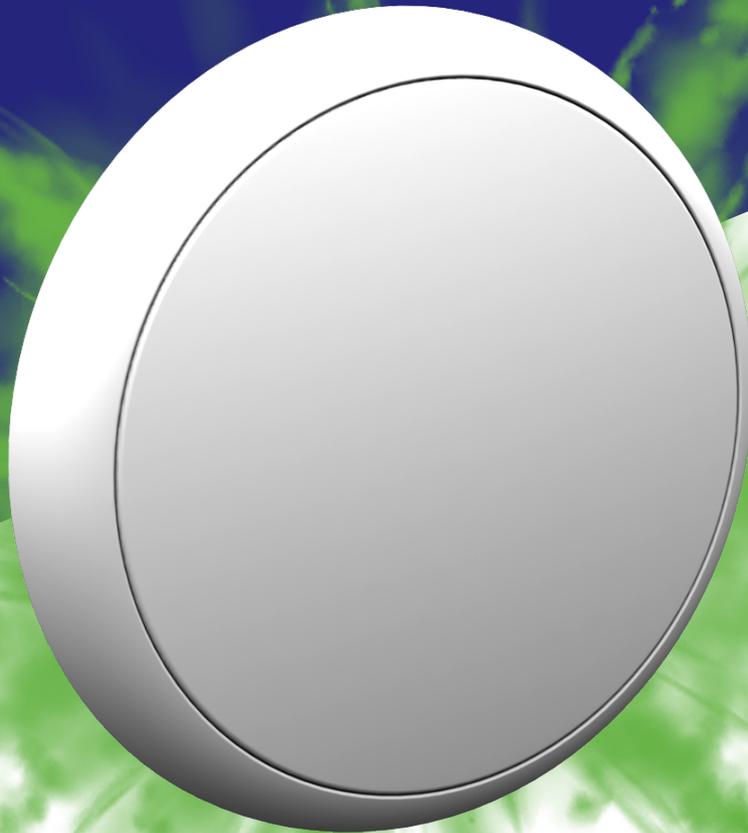

Give your contractor the power to choose

- Selectable power settings (12W or 18W), selectable colour temperature (3000K, 4000K or 6500K), **and** a choice between Standard, Emergency, Microwave Sensor and Microwave Sensor Emergency

Installation has never been easier

- 5 rear and side entry positions ensures effortless wiring saving your contractor heaps of time on site
- A 70mm depth - perfect for those areas with limited space


DUAL WATTAGE DRIVER



5 REAR AND SIDE CABLE ENTRY POINTS



OPTIONAL BLACK AND CHROME RINGS

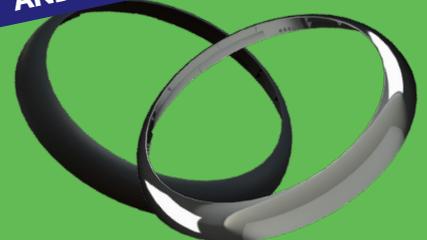

Technical Specifications

Colour Rendering	>80 CRI
Driver Output Voltage (DC)	16-28V
Fire Rating	V2
Input Voltage (AC)	220-240V
Lamp Viewing Angle	120°
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	56
Total Circuit Power	12W/18W
Luminaire Efficacy	100lm/W
Operating Temp.	-10°C to +40°C
Power Factor	>0.80
UGR Rating	More than 22
Housing Material	Polycarbonate
Housing Colour	White
Weight	0.682Kg
Electrical Class	2
Lifespan LM ₈₀	30,000 Hours
Diffuser Material	Polycarbonate
Dimmable	No
Manufacturer	Senselite Co. Ltd.



Black Ring
NET-41-06-12



Chrome Ring
NET-41-06-10

Part Numbers

Part Number	Description
NET-41-06-02	Standard
NET-41-06-04	Emergency
NET-41-06-06	Microwave Sensor
NET-41-06-08	Microwave Sensor Emergency
NET-41-06-10	Chrome Ring
NET-41-06-12	Black Ring

Order now over at
www.mynetled.co.uk

We stock them, so
you don't have to!
Delivery direct to
branch or site.

 **ORDER BY 6PM**
FOR NEXT DAY DELIVERY

 **NET LED**
LIGHTING