

**Time is money -  
save both.**



**Choose from four  
different power settings.**

- The multi-wattage driver allows your contractor to choose from 85W, 100W, 150W or 200W at the time of installation
- Turn the fitting from Standard to Dimmable in minutes with the 1-10V Dimming as Standard

**Optional Microwave Sensor  
and Emergency Kit**

- Include a Microwave Sensor to conserve energy and ensure the fitting comes on only when it's needed
- The 3H Emergency Kit provides up to 3 hours of emergency lighting in the event of a power failure


**IP65 AND IK09  
RATED HOUSING**



**OPTIONAL  
MICROWAVE SENSOR**



**OPTIONAL 3H  
EMERGENCY KIT**

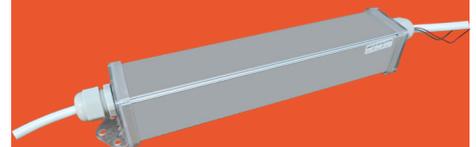

# Technical Specifications


Colour Rendering	80 Ra
Driver Output Voltage (DC)	120V
Fire Rating	V2
Input Voltage (AC)	100-277V
Lamp Viewing Angle	90°
LED Manufacturer	Smalite
LED Type	SMD 2835
Luminaire Efficacy	155lm/W
Operating Temp.	-40°C to +50°C
Power Factor	>0.95
UGR Rating	>19
Driver Manufacturer	Changhong
Electrical Class	1
Housing Colour	Black
Housing Material	Aluminium
Lifespan LM80	50,000 Hours
Diffuser Material	PC
Dimmable	Yes
Dimming Input Type	1-10V as Standard
Manufacturer	Kingsway Lighting



**85W/100W/150W/200W  
Standard**  
NET-53-20-02



**Remote Control for  
Microwave Sensor**  
NET-53-20-06



**3H Emergency Kit**  
NET-53-20-08



**Microwave Sensor**  
NET-53-20-04

## Part Numbers

Part Number	Description
NET-53-20-02	Arbury Multi-Wattage High Bay Standard
NET-53-20-08	3H Emergency Kit
NET-53-20-04	Microwave Sensor
NET-53-20-06	Remote Control for Microwave Sensor

Order now over at  
[www.mynetled.co.uk](http://www.mynetled.co.uk)

**We stock them, so  
you don't have to!**  
Delivery direct to  
branch or site.

 **ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

**NET LED  
LIGHTING**