

POWER SHIFT HIGH POWER EMERGENCY KIT FOR ORWELL/BURWELL HIGH BAYS 8W

NET-23-12-70



Features & Benefits

- High output emergency operation
- Choose between Self Test Emergency or manual Emergency at the time of installation
- Compatible with Orwell Multi-Wattage High Bays and Burwell Multi-Wattage Linear High Bays

Key Data

Power	8W
IP Rating	IP65
Dimensions	153.5 x 119.5mm
Warranty	3 Years

Compatible Accessories

NET-15-16-20	Bracket for Power Shift High Power Emergency Kit
--------------	--

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Total Circuit Power (W)	8W
Manufacturer	Streamer
Hours Maintained	>3H
Output Power	8W
Output Voltage	9-55V
Power Frequency	50/60Hz
Recharge Period	24H
Self Test	Selectable
Housing Colour	Black
Battery Pack	LiFePO4 6.4V 6Ah
Emergency Kit	1 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer

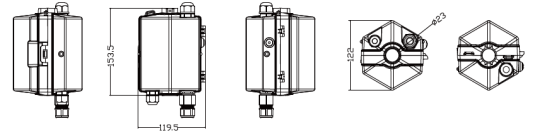

Other Options

Description	
NET-23-12-70	Power Shift High Power Emergency Kit for Orwell/Burwell High Bays 8W

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY