


## MANUAL/SELF TEST EMERGENCY SELECTABLE LED CONVERTER 2.5W

NET-50-12-08

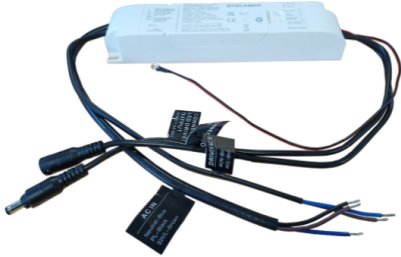

### Features & Benefits

- Choose between Self Test Emergency and manual 3H Emergency operation
- Compatible with LED Panels and Downlights

### Key Data

<b>Power</b>	2.5W
<b>Dimensions</b>	200 x 43 x 30mm
<b>Warranty</b>	3 Years

### NET LED Lighting

Buckingway Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	0.5
Driver Output Voltage (DC)	50-300V
Total Circuit Power (W)	2.5W
Electrical Class	2
Operating Temp.	0°C to +60°C
Weight	329.45g
Manufacturer	Cambridge LED
AC Current	220-240V
Hours Maintained	>3H
Output Current	40mA
Output Power	2.5W
Output Voltage	10-50V
Power Frequency	50/60Hz
Recharge Period	>24H
Self Test	Selectable
Housing Colour	White
Housing Material	Polycarbonate
Battery Pack	LiFePO4 3.2V 3.2mAh
Battery Warranty	1 Year
Charge Time	>24H
Emergency Operation	3H or Self Test

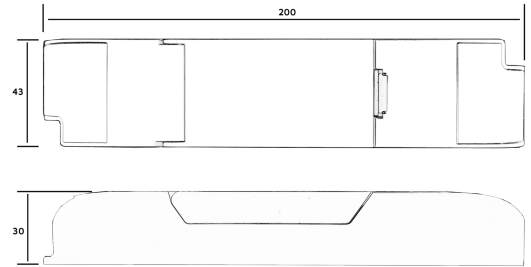

## Other Options

Description	
NET-50-12-08	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-61-33-03	DALI Emergency Kit 3W

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk