

PIR SENSOR FOR BURY CORN LAMPS

NET-53-12-20



Features & Benefits

- Ø10m detection range
- 0-60% dimming level
- Operates with minimal energy usage (1.5W)
- Uses PIR technology to detect movement and activate lights only when motion is present
- Automatically turns lights on when motion is detected and switches them off after a period of inactivity
- Quick and simple installation

Key Data

Power	1.5W
IP Rating	IP20
Dimensions	52.3 x 43 x 3.5mm
Warranty	2 Years

NET LED Lighting

Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	15V
Total Circuit Power (W)	1.5W
Operating Temp.	-20°C to +35°C
Manufacturer	Kingsway Lighting Ltd.
Lux Levels	300lux
Output Current	20mA
Output Voltage	0-10V
Housing Colour	White
Detection Angle	120°
Duration	30s/90s/5min//10min
Max. Detection Area	Ø10m
Standby Dimming Level	0-60%

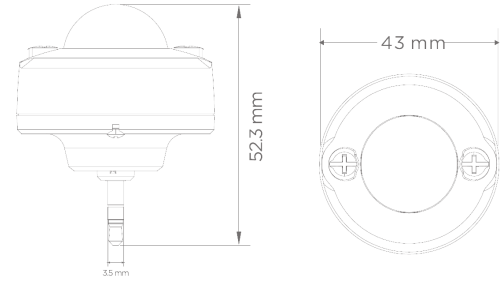

Other Options

Description	
NET-53-12-20	PIR Sensor for Bury Corn Lamps

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY