

MICROWAVE SENSOR FOR ARBURY MULTI-WATTAGE HIGH BAYS

NET-53-20-04



Features & Benefits

- Compatible with Arbury Multi-Wattage High Bays
- Up to 13m detection range
- Hold time 3s/30s/1min/3min/5min/10min/20min/30min
- Stand-by dimming level 10%/20%/30%/50%
- Can be controlled via a Remote Control (NET-53-20-06)
- Daylight threshold 2-120lux or Disabled

Key Data

Power	<0.3mW
Dimensions	Ø60 x 24 x 0.7mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-53-20-06	Remote Control for Arbury Microwave Sensor
--------------	--

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	11-15V
Operating Temp.	-35°C to +70°C
Manufacturer	Kingsway Lighting
Lux Levels	2lux/10lux/30lux/50lux/80lux/120lux/Disabled
Max. Detection Distance	12m (ceiling)
Output Current	22mA
Output Voltage	0-10V
Max. Mounting Height	12m (ceiling)
Housing Colour	White
Housing Material	Polycarbonate
Detection Angle	30°-150°
Duration	3s/30s/1min/3min/5min/10min/20min/30min
Max. Detection Area	12m (ceiling)
Standby Dimming Level	10%/20%/30%/50%

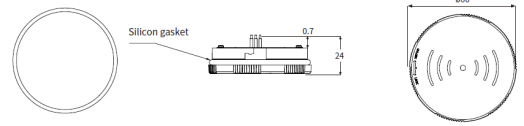

Other Options

Description	
NET-53-20-04	Microwave Sensor for Arbury Multi-Wattage High Bays

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY