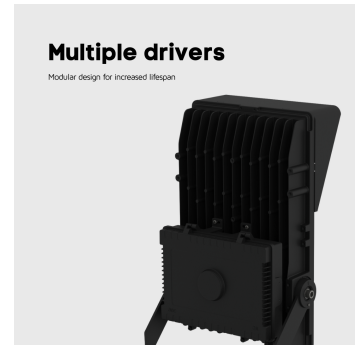



BENWICK OPEN AREA FLOOD LIGHT 6000K 500W

NET-23-04-65


Features & Benefits

- IP66 and IK10 rated housing
- Low maintenance back plate with a protective mesh
- Adjustable bracket for easy installation
- Multiple drivers for greater reliability
- 10KV surge protection
- Light shield to reduce spillage

Key Data

Power	500W
Luminous Flux	70400lm
Colour Temperature	6000K
IP Rating	IP66
IK Rating	IK10
Dimensions	691 x 378 x 261mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-23-04-67	Wire Guard for Benwick Open Area Flood Lights
NET-23-16-61	Single Column Bracket
NET-23-16-63	Twin Column Bracket

NET LED Lighting


 Buckingham Business Park, 300 Anderson Road,
 Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk


ORDER BY 6PM
 FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	100-250V
Power Factor	>0.9
Luminaire Efficacy	140lm/W
LED Manufacturer	Lumileds
LED Type	EMC 3030
Driver Manufacturer	Tomcarline
Driver Output Voltage (DC)	42V
Total Circuit Power (W)	500W
Electrical Class	1
Colour Rendering	>70 CRI
Lamp Viewing Angle	30° x 70°
Dimmable	No
Operating Temp.	-15°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	More than 25
Weight	18.5Kg
Manufacturer	FYTLED
Fire Rating	V1
Housing Colour	Black
Housing Material	Aluminium
Diffuser Material	PMMA

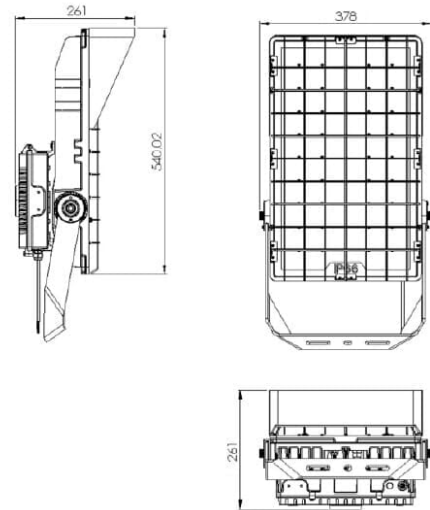

Other Options

Description	
NET-23-04-65	Benwick Open Area Flood Light 6000K 500W

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

140
lm/W

IP66 AND IK10 RATED HOUSING

Protected from impact and
harsh weather conditions


6K

6000K COLOUR TEMPERATURE

Bright and crisp light best used
for industrial and sports applications

MULTIPLE DRIVERS WITH 10KV SURGE PROTECTION

Greater reliability and provides
robust protection against
voltage spikes

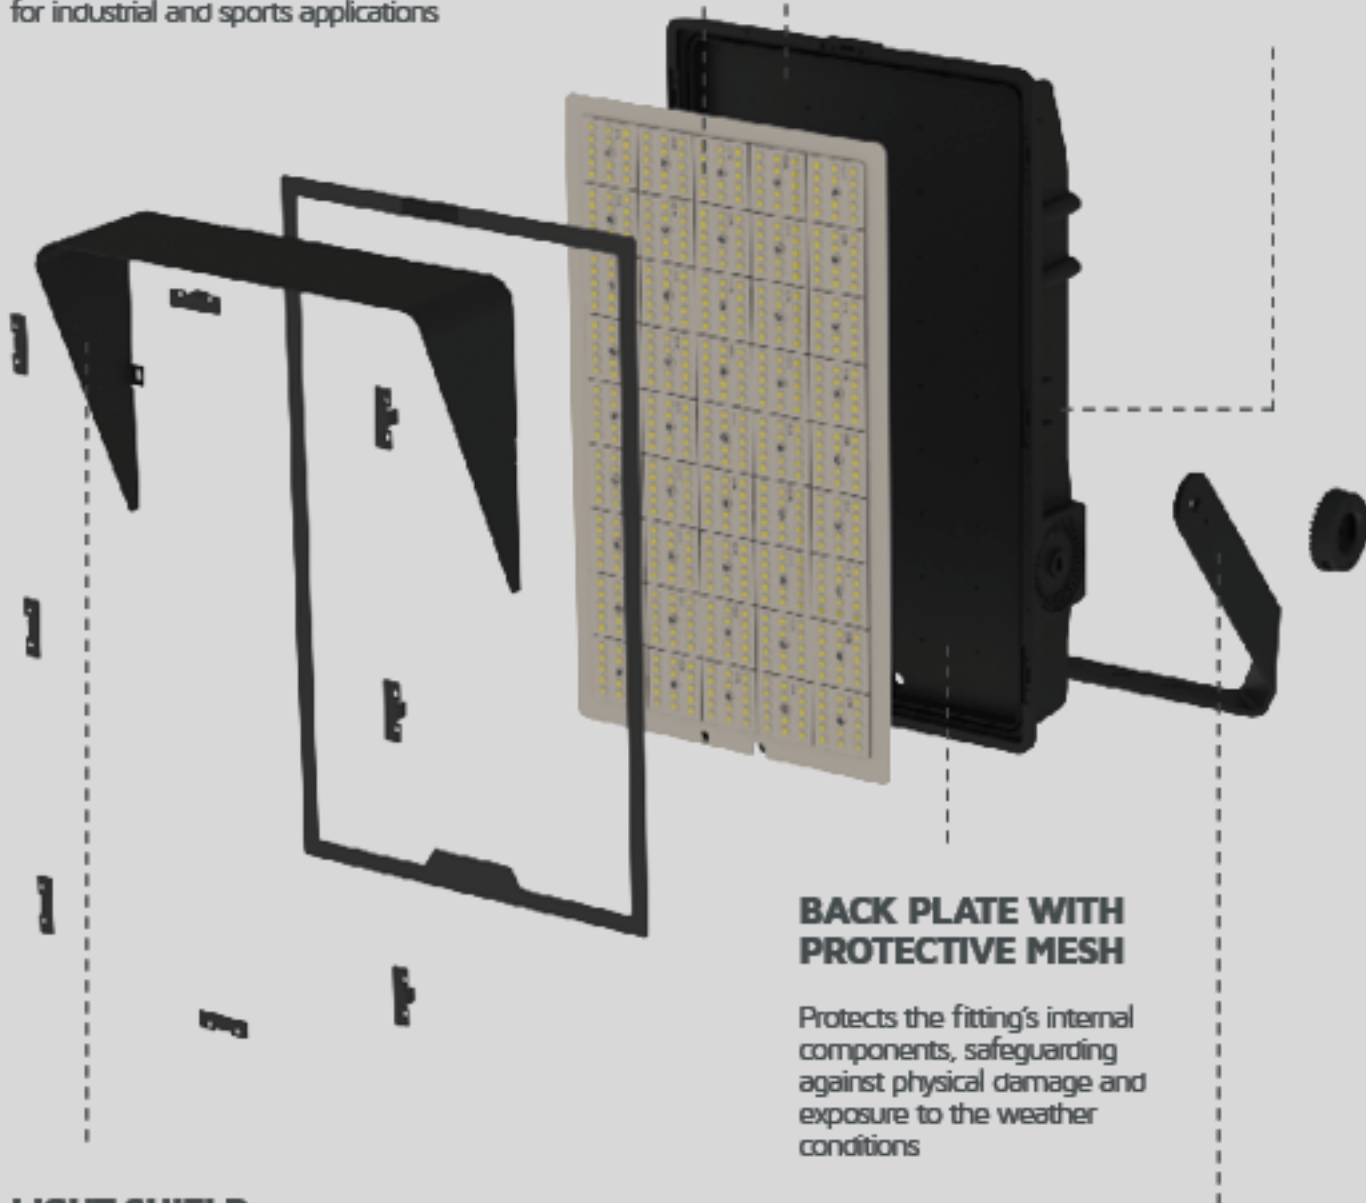

BACK PLATE WITH PROTECTIVE MESH

Protects the fitting's internal
components, safeguarding
against physical damage and
exposure to the weather
conditions

LIGHT SHIELD

Reduces light spillage into
unintended areas – crucial in urban
environments or areas near wildlife

ADJUSTABLE BRACKET

Allows for easier mounting
and provides flexibility when
positioning the fitting