

BURWELL LINEAR HIGH BAY 4000K 90W/120W/150W EMERGENCY/SELF TEST


NET-23-12-04


**High power
20W Emergency
function**

The integral Emergency Battery ensures the fitting stays on in the event of an emergency or power failure


**Low glare
diffuser**

Reduce glare and improve eye comfort in sports halls and warehouses


Features & Benefits

- High Power 20W Emergency function
- Low glare diffuser rated UGR<16
- IP65 and IK10 rated housing
- Choose between 90W, 120W or 150W at the time of installation
- Low glare diffuser rated UGR<16

Key Data

Power	90W/120W/150W
Luminous Flux	15250lm/20500lm/25100lm
Colour Temperature	4000K
IP Rating	IP65
IK Rating	IK10
Dimensions	440 x 178 x 91mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-23-12-72	PIR Sensor for Orwell/Burwell High Bays
NET-23-12-73	Smart Daylight Harvesting Sensor for Orwell/Burwell High Bays
NET-23-12-74	Smart BLE Microwave Step Dimming Sensor for Orwell/Burwell High Bays
NET-23-12-75	Smart BLE Slave Sensor for Orwell/Burwell High Bays
NET-15-16-20	Bracket for Power Shift High Power Emergency Kit

NET LED Lighting


 Buckingham Business Park, 300 Anderson Road,
 Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk


ORDER BY 6PM
 FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	120-277V
Power Factor	0.95
Luminaire Efficacy	175lm/W
LED Manufacturer	Sanan
LED Type	SMD 2835
No. of LEDs	280
Driver Manufacturer	Tomcarline
Driver Output Voltage (DC)	180-260V DC
Total Circuit Power (W)	90W/120W/150W
Electrical Class	1
Colour Rendering	80Ra
Lamp Viewing Angle	90°
Dimmable	No
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	Less than 16
Weight	4.4Kg
Manufacturer	FYTLED Co. Ltd.
Fire Rating	V0
Hours Maintained	3H
Luminous Flux Factor	9%/6.7%/5.3%
Self Test	Selectable
Housing Colour	Grey
Housing Material	Aluminium
Battery Pack	LiFePO4
Battery Warranty	3 Years Warranty
Charge Time	24H
Diffuser Material	PC
Emergency Kit	3 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer

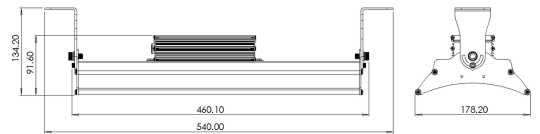

Other Options

Description	
NET-23-12-02	Burwell Linear High Bay 4000K 90W/120W/150W Standard
NET-23-12-04	Burwell Linear High Bay 4000K 90W/120W/150W Emergency/Self Test
NET-23-12-06	Burwell Linear High Bay 4000K 90W/120W/150W Microwave Sensor
NET-23-12-08	Burwell Linear High Bay 4000K 90W/120W/150W Microwave Sensor Emergency/Self Test

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

SURFACE MOUNT BRACKETS AND 1M SUSPENSION KIT INCLUDED

Install the high bay in a variety of settings

MULTI-WATTAGE DRIVER

Choose between 90W, 120W or 150W at the time of installation

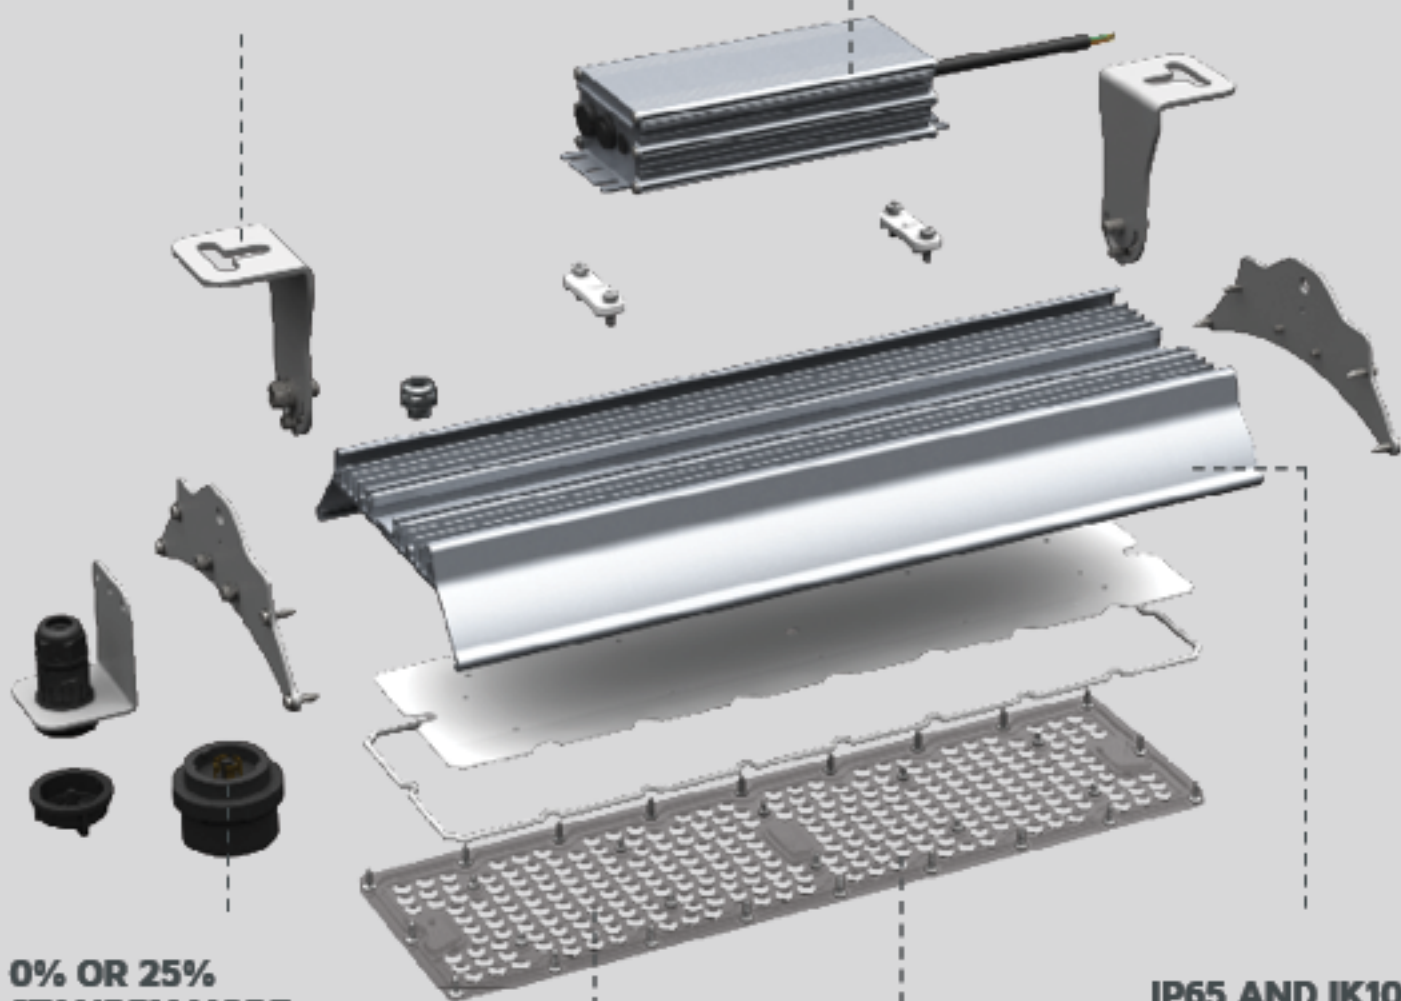

0% OR 25% STANDBY MODE

Reduce unnecessary energy consumption by avoiding lighting in areas that don't need it

Microwave Sensor options only

4000K COLOUR TEMPERATURE

Bright and crisp light best used for industrial applications or sports halls

LOW GLARE DIFFUSER

Reduce glare and improve eye comfort in sports halls and warehouses

IP65 AND IK10 RATED HOUSING

Protect your fitting from moisture, dust and impact

4K