

ORWELL HIGH BAY 5000K 100W EMERGENCY

NET-23-12-43

**Features & Benefits**

- High Power 20W Emergency function
- Highly efficient heat sink
- Suspension ring for easy installation
- 1m flex
- Dimmable Driver as standard
- Suitable for Low Bay installation with wide beam angle

Key Data

Power	100W
Luminous Flux	17600lm
Colour Temperature	5000K
IP Rating	IP65
IK Rating	IK10
Dimensions	Ø305 x 280mm
Warranty	5 Years (Registration Required)

NET LED Lighting

Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	200-240V
Power Factor	>0.95
Luminaire Efficacy	176lm/W
LED Manufacturer	MTC
LED Type	SMD 2835
No. of LEDs	288
Driver Manufacturer	Tomcarline
Driver Output Voltage (DC)	142V
Total Circuit Power (W)	100W +/- 10W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	Less than 30
Weight	6.3Kg
Manufacturer	FYTLED
Fire Rating	V2
Luminous Flux Factor	20%
Self Test	No
Housing Colour	Black
Housing Material	Aluminium
Battery Pack	Streamer
Diffuser Material	Polycarbonate
Dimming Input Type	1-10V as Standard
Emergency Kit	3 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer

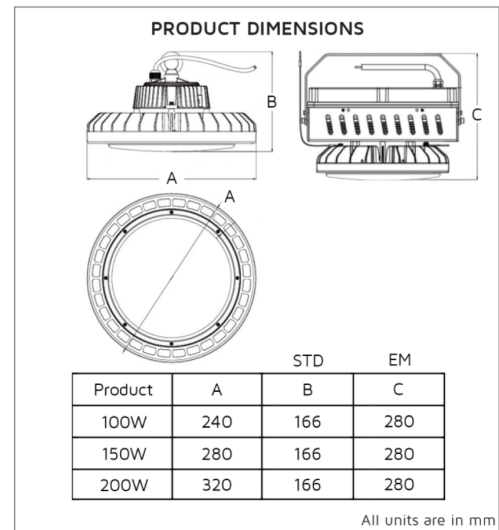

Other Options

Description	
NET-23-12-43	Orwell High Bay 5000K 100W Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY