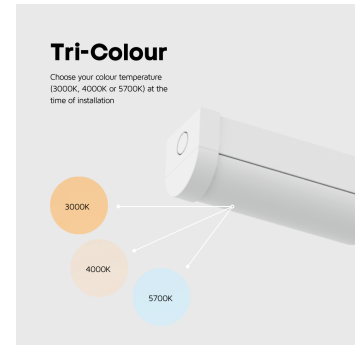
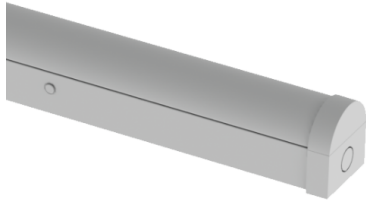


**FOXTON BATTEN TRI-COLOUR 1500MM (5FT) 50W BLUETOOTH**

NET-41-11-84


**Features & Benefits**

- Pre-set scenes and brightness levels
- Controlled via the App or optional Bluetooth Dimmable/Scene Switch
- Selectable colour temperature 3000K, 4000K or 5700K
- Rear or end cable entry
- Tridonic driver as standard
- Push connector for quick and easy installation

**Key Data**

<b>Power</b>	50W
<b>Luminous Flux</b>	6500lm
<b>Colour Temperature</b>	3000K/4000K/5700K
<b>IP Rating</b>	IP20
<b>IK Rating</b>	IK04
<b>Dimensions</b>	1520 x 63 x 73mm
<b>Warranty</b>	5 Years (Registration Required)

**Compatible Accessories**

NET-61-33-04	DALI Emergency Kit 3W/6W
NET-42-43-38	Merrytek Microwave Sensor IP65 20mm Knock Out
NET-46-16-04	Universal LED NCF / Batten Suspension Kit
NET-60-16-80	Tridonic Bluetooth Multifunction Dimmable/Scene Switch
NET-42-43-24	DALI Dimmer Switch
NET-51-11-01	PIR Sensor (External) for Battens and NCFs

**NET LED Lighting**

 Buckingham Business Park, 300 Anderson Road,  
 Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk


**ORDER BY 6PM**  
 FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	480
Driver Manufacturer	Tridonic Premium Series
Driver Output Voltage (DC)	20-54V
Total Circuit Power (W)	50W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	-10°C to +40°C
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Manufacturer	Senselight
Fire Rating	V2
Housing Colour	White
Housing Material	Steel
Diffuser Material	Polycarbonate
Dimming Input Type	Bluetooth Dimming

**PRODUCT DIMENSIONS**

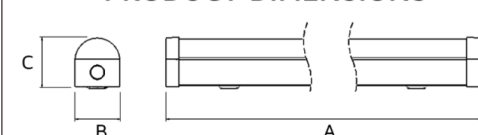

Size (ft)	A	B	C
2	600	63	73
4	1200	63	73
5	1500	63	73
6	1800	63	73

All units are in mm

## Other Options

Description	
NET-41-11-96	Foxton Batten Tri-Colour 1500mm (5ft) 50W Standard
NET-41-11-95	Foxton Batten Tri-Colour 1500mm (5ft) 50W Emergency
NET-41-12-95	Foxton Batten Tri-Colour 1500mm (5ft) 50W Self Test Emergency
NET-41-11-13	Foxton Batten Tri-Colour 1500mm (5ft) 50W Dimmable one4all
NET-41-11-14	Foxton Batten Tri-Colour 1500mm (5ft) 50W Dimmable Emergency
NET-41-11-82	Foxton Batten Tri-Colour 1500mm (5ft) 50W Dimmable DALI Emergency
NET-41-11-83	Foxton Batten Tri-Colour 1500mm (5ft) 50W PIR Sensor On/Off
NET-41-12-83	Foxton Batten Tri-Colour 1500mm (5ft) 50W PIR Sensor On/Off Emergency
NET-41-11-84	Foxton Batten Tri-Colour 1500mm (5ft) 50W Bluetooth
NET-41-12-84	Foxton Batten Tri-Colour 1500mm (5ft) 50W Bluetooth Emergency

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

**COMBINED DIFFUSER AND LEDS**

Stop juggling multiple parts and install a diffuser that comes with built-in LEDs

**FLICKER-FREE TRIDONIC DIMMABLE DRIVER**

Ensure reliability, durability and performance leading to long-lasting LEDs

*Dimmable options only*

**NEW**

**MANUAL OR SELF TEST EMERGENCY SELECTABLE**

Choose between manual emergency or self test emergency at the time of installation

*Emergency options only*

**REAR OR END CABLE ENTRY**

Create seamless end-to-end lighting designs

**WIRELESS CONTROL**

Control the panel remotely via smartphone or tablet with it's Bluetooth Dimmable Driver

*Bluetooth options only*

**SELECTABLE COLOUR TEMPERATURE**

Choose your colour temperature 3000K, 4000K or 5700K

3K

4K

5.7K