
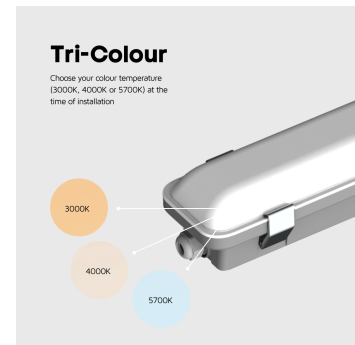


## HILTON NCF TRI-COLOUR 1800MM (6FT) 62W/80W SELF TEST EMERGENCY

NET-41-12-13



### Features & Benefits

- Self Test Emergency function
- Flicker-free, 0-10V dimmable driver as standard
- Selectable power setting 62W or 80W
- Selectable colour temperature 3000K, 4000K or 5700K
- Diffuser comes with built-in LEDs
- Tamper-proof fixings

### Key Data

<b>Power</b>	62W/80W
<b>Luminous Flux</b>	8060lm/10400lm
<b>Colour Temperature</b>	3000K/4000K/5700K
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK08
<b>Dimensions</b>	1840 x 100 x 85mm
<b>Warranty</b>	5 Years (Registration Required)

### Compatible Accessories

NET-42-43-33	Merrytek Microwave Sensor IP65 with Standby Function (External)
NET-46-16-04	Universal LED NCF / Batten Suspension Kit
NET-51-11-01	PIR Sensor (External) for Battens and NCFs
NET-51-11-03	On/Off Step Dimming Sensor (External) for Battens and NCFs

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	480
Driver Manufacturer	BOKE
Driver Output Voltage (DC)	24-42V
Total Circuit Power (W)	62W/80W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Weight	2.740Kg
Manufacturer	Senselight
Fire Rating	V2
Hours Maintained	3H
Self Test	Yes
Housing Colour	Grey
Housing Material	Polycarbonate
Battery Pack	LiFePO4
Diffuser Material	Polycarbonate
Dimming Input Type	0-10V as Standard
Emergency Kit	3 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer

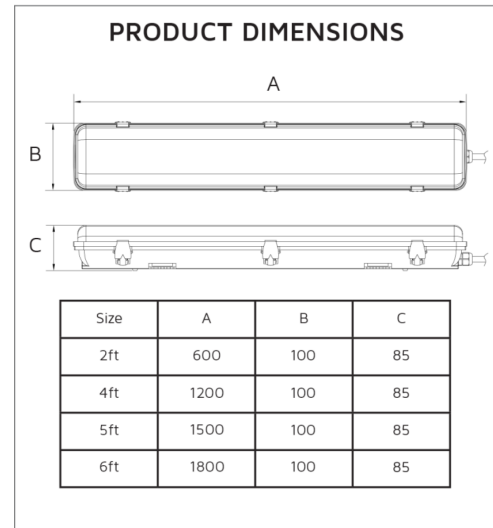

## Other Options

Description	
NET-41-11-11	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Standard
NET-41-12-11	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Emergency
NET-41-12-13	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Self Test Emergency
NET-41-11-21	Hilton NCF Tri-Colour 1800mm (6ft) 80W Dimmable one4all
NET-41-12-15	Hilton NCF Tri-Colour 1800mm (6ft) 80W Dimmable Emergency
NET-41-12-21	Hilton NCF Tri-Colour 1800mm (6ft) 80W Dimmable DALI Emergency
NET-41-11-67	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming PIR Sensor
NET-41-12-67	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming PIR Sensor Emergency
NET-41-11-89	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming Microwave Sensor
NET-41-12-89	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming Microwave Sensor Emergency

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

Up to  
**140**  
lm/W

## COMBINED DIFFUSER AND LEDS

Stop juggling multiple parts when installing with a diffuser that comes with built-in LEDs

## PUSH CONNECTOR

Reduce installation time with easy-to-use push fit terminals

## FLICKER-FREE TRIDONIC DRIVER

Ensure reliability, durability and performance leading to long-lasting LEDs

## IP65 AND IK08 RATED HOUSING

Protect your fitting from water, dust and impact

## TAMPER-PROOF FIXINGS

Prevent unwanted removal or tampering

**NEW**

## MANUAL OR SELF TEST EMERGENCY SELECTABLE

Choose between manual emergency or self test emergency at the time of installation

*Emergency options only*

