

## MERRYTEK DAYLIGHT SENSOR 1-10V (INTERNAL)

NET-42-43-12



### Features & Benefits

- Distinguishes between artificial and natural light
- Can be precisely pre-set via Rotary wheel (potentiometer)
- Directly connected to 1-10V interface
- Control up to 8 fittings
- Flexible mounting options
- Compatible with any 1-10V Dimming Driver

### Key Data

<b>IP Rating</b>	IP20
<b>Dimensions</b>	69.3 x Ø21.47mm
<b>Warranty</b>	3 Years

### NET LED Lighting

Buckingway Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Operating Temp.	0°C to +45°C
Manufacturer	Merrytek
Lux Levels	5lux - 200lux
Housing Colour	White
Housing Material	Polycarbonate
Detection Angle	90°
Dimming Range	1-100%

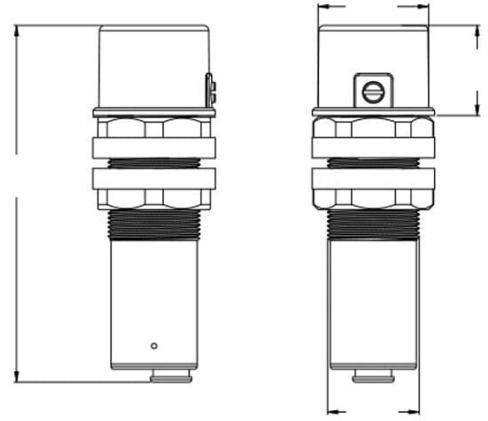

## Other Options

Description	
NET-42-43-12	Merrytek Daylight Sensor 1-10V (Internal)

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY