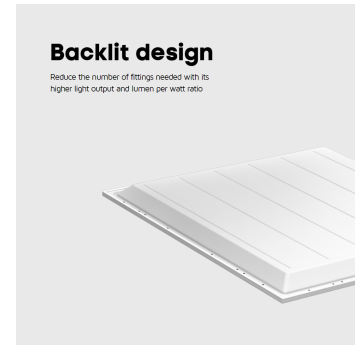
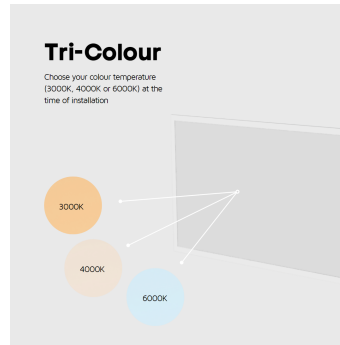


**ASHLEY BACKLIT PANEL UGR<19 TRI-COLOUR 1200X600 50W TP(A) STANDARD**

NET-43-03-30


**Features & Benefits**

- Low glare diffuser with UGR rating <19
- TP(a) flammability-rated diffuser
- Selectable 3000K, 4000K or 6000K colour temperature
- Flicker-free driver
- Backlit for a uniform light distribution

**Key Data**

<b>Power</b>	50W
<b>Luminous Flux</b>	6000lm/6500lm/6000lm
<b>Colour Temperature</b>	3000K/4000K/6000K
<b>IP Rating</b>	IP20
<b>Dimensions</b>	1195 x 595 x 25mm
<b>Warranty</b>	5 Years (Registration Required)

**Compatible Accessories**

NET-39-16-01	Recess Clips (set of 4)
NET-50-12-08	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-61-33-03	DALI Emergency Kit 3W
NET-61-35-13	Buckden Self Test Emergency Kit 3W for Panels and Downlights
NET-60-43-80	Tridonic Triac Dimmable Driver 30W/45W (600x600mm and 1200x600mm Panels)
NET-39-03-43	Panel Surface Box 1200x600mm
NET-43-16-05	Suspension Kit for 1200x600mm Ashley Panels

**NET LED Lighting**

 Buckingham Business Park, 300 Anderson Road,  
 Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk


**ORDER BY 6PM**  
 FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	130lm/W
LED Manufacturer	Hongliitronic
LED Type	SMD 2835
No. of LEDs	84
Driver Manufacturer	Tridonic
Driver Output Voltage (DC)	30-42V
Total Circuit Power (W)	50W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	Less than 19
Diffuser/LGP Material	PS
Weight	3.2Kg
Manufacturer	Sochii Lighting
Frame Colour	White



## Other Options

Description	
NET-43-03-30	Ashley Backlit Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Standard
NET-43-03-31	Ashley Backlit Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Emergency/Self Test
NET-43-03-32	Ashley Backlit Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Dimmable - Push/DALI
NET-43-03-33	Ashley Backlit Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Dimmable Emergency/Self Test
NET-43-03-35	Ashley Backlit Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Dimmable DALI Emergency

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)

Up to  
**140**  
lm/W

### BACKLIT DESIGN

Reduce the number of fittings needed with its higher light output and lumen per watt ratio

### SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 4000K, 5000K or 6000K

4K

5K

6K

### WIRELESS CONTROL

Control the panel remotely via smartphone or tablet with its Bluetooth Dimmable Driver

*Bluetooth options only*

### TRIDONIC DIMMABLE DRIVER

Customise lighting levels and reduce energy consumption

*Dimmable options only*

### MANUAL OR SELF TEST EMERGENCY SELECTABLE

Choose between manual emergency or self test emergency at the time of installation

*Emergency options only*

### LOW GLARE UGR<19 AND TP(A) FLAMMABILITY RATED DIFFUSER

Reduce headaches and comply with Building Regulations

