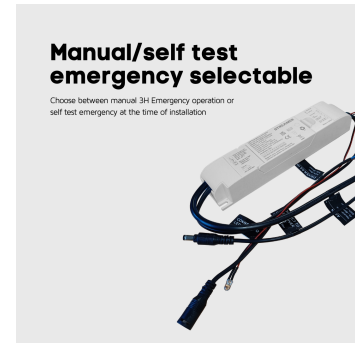


ASHLEY BACKLIT PANEL UGR<19 TRI-COLOUR 1200X600 50W TP(A) DIMMABLE

NET-43-03-33


Tridonic Excite Dimmable driver

Allows for one4all Dimming - DALI 1 & 2 and switchDIM options


Manual/self test emergency selectable

Choose between manual 3H Emergency operation or self test emergency at the time of installation

Features & Benefits

- Manual or self test selectable emergency operation
- Tridonic one4all Dimming - DALI 1 & 2 or switchDIM (Push)
- Low glare diffuser with UGR rating <19
- TP(α) flammability-rated diffuser
- Selectable 3000K, 4000K or 6000K colour temperature
- Flicker-free driver

Key Data

Power	50W
Luminous Flux	6000lm/6500lm/6000lm
Colour Temperature	3000K/4000K/6000K
IP Rating	IP20
Dimensions	1195 x 595 x 25mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-39-16-01	Recess Clips (set of 4)
NET-39-03-43	Panel Surface Box 1200x600mm
NET-43-16-05	Suspension Kit for 1200x600mm Ashley Panels

NET LED Lighting

 Buckingham Business Park, 300 Anderson Road,
 Swavesey, Cambridge, CB24 4UQ

 T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

ORDER BY 6PM
 FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	130lm/W
LED Manufacturer	Hongliitronic
LED Type	SMD 2835
No. of LEDs	84
Driver Manufacturer	Tridonic
Driver Output Voltage (DC)	30-42V
Total Circuit Power (W)	50W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	Less than 19
Diffuser/LGP Material	PS
Weight	3.2Kg
Manufacturer	Sochii Lighting
Frame Colour	White
Hours Maintained	3H
Luminous Flux Factor	7%
Self Test	Selectable
Battery Pack	LiFePO4
Battery Warranty	2 Year Warranty
Charge Time	24H
Dimming Input Type	DALI 1 & 2 and switchDIM (Push)
Emergency Kit	3 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer



Other Options

Description	
NET-43-03-30	Ashley Backlit Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Standard
NET-43-03-31	Ashley Backlit Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Emergency/Self Test
NET-43-03-32	Ashley Backlit Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Dimmable - Push/DALI
NET-43-03-33	Ashley Backlit Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Dimmable Emergency/Self Test
NET-43-03-35	Ashley Backlit Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Dimmable DALI Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Up to
140
lm/W

BACKLIT DESIGN

Reduce the number of fittings needed with its higher light output and lumen per watt ratio

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 4000K, 5000K or 6000K

4K

5K

6K

WIRELESS CONTROL

Control the panel remotely via smartphone or tablet with its Bluetooth Dimmable Driver

Bluetooth options only

TRIDONIC DIMMABLE DRIVER

Customise lighting levels and reduce energy consumption

Dimmable options only

MANUAL OR SELF TEST EMERGENCY SELECTABLE

Choose between manual emergency or self test emergency at the time of installation

Emergency options only

LOW GLARE UGR<19 AND TP(A) FLAMMABILITY RATED DIFFUSER

Reduce headaches and comply with Building Regulations

