


## ASHLEY BACKLIT PANEL UGR<19 4000K 600X600 36W TP(A) DIMMABLE DALI

NET-43-03-39

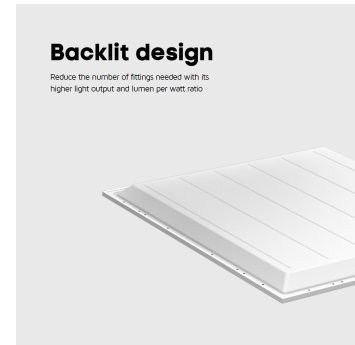

### Features & Benefits

- DALI Addressable Emergency function
- Tridonic one4all Dimming - DALI 1 & 2 or switchDIM (Push)
- Low glare diffuser with UGR rating <19
- TP(α) flammability-rated diffuser
- Single colour temperature 4000K
- Flicker-free driver

### Key Data

<b>Power</b>	36W
<b>Luminous Flux</b>	3240-3600lm
<b>Colour Temperature</b>	4000K
<b>IP Rating</b>	IP20
<b>Dimensions</b>	595 x 595 x 25mm
<b>Warranty</b>	5 Years (Registration Required)

### Compatible Accessories

NET-39-16-01	Recess Clips (set of 4)
NET-39-03-47	Panel Recessed Frame 600x600mm
NET-39-03-39	Panel Surface Box 600x600mm
NET-43-16-04	Suspension Kit for 600x600mm Ashley Panels

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	100lm/w
LED Manufacturer	Hongliitronic
LED Type	SMD 2835
No. of LEDs	42
Driver Manufacturer	Tridonic
Driver Output Voltage (DC)	30-42V
Total Circuit Power (w)	36W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	Less than 19
Diffuser/LGP Material	PS
Weight	1.56Kg
Manufacturer	Sochii Lighting
Frame Colour	White
Hours Maintained	3H
Self Test	No
Battery Pack	LiFePO4
Battery Warranty	1 Year Warranty
Dimming Input Type	DALI Addressable
Emergency Kit	3 Year Warranty
Emergency Operation	>3H
Emergency Pack	Fox Lux

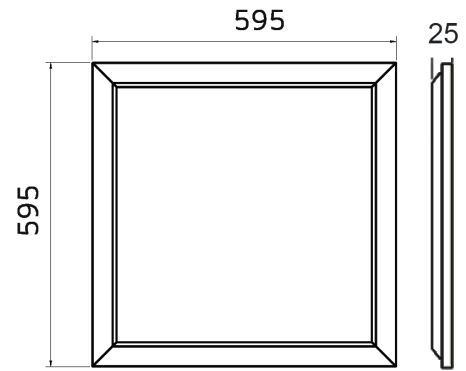

All units are in mm

## Other Options

Description	
NET-43-03-60	Ashley Backlit Panel UGR<19 4000K 600x600 36W TP(a) Standard
NET-43-03-61	Ashley Backlit Panel UGR<19 4000K 600x600 36W TP(a) Emergency/Self Test
NET-43-03-62	Ashley Backlit Panel UGR<19 4000K 600x600 36W TP(a) Dimmable one4all
NET-43-03-63	Ashley Backlit Panel UGR<19 4000K 600x600 36W TP(a) Dimmable Emergency/Self Test
NET-43-03-39	Ashley Backlit Panel UGR<19 4000K 600x600 36W TP(a) Dimmable DALI Emergency

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk


Up to  
**140**  
lm/W

## BACKLIT DESIGN

Reduce the number of fittings needed with its higher light output and lumen per watt ratio

## TRIDONIC DRIVER AS STANDARD

Ensure reliability, durability and performance leading to long-lasting LEDs

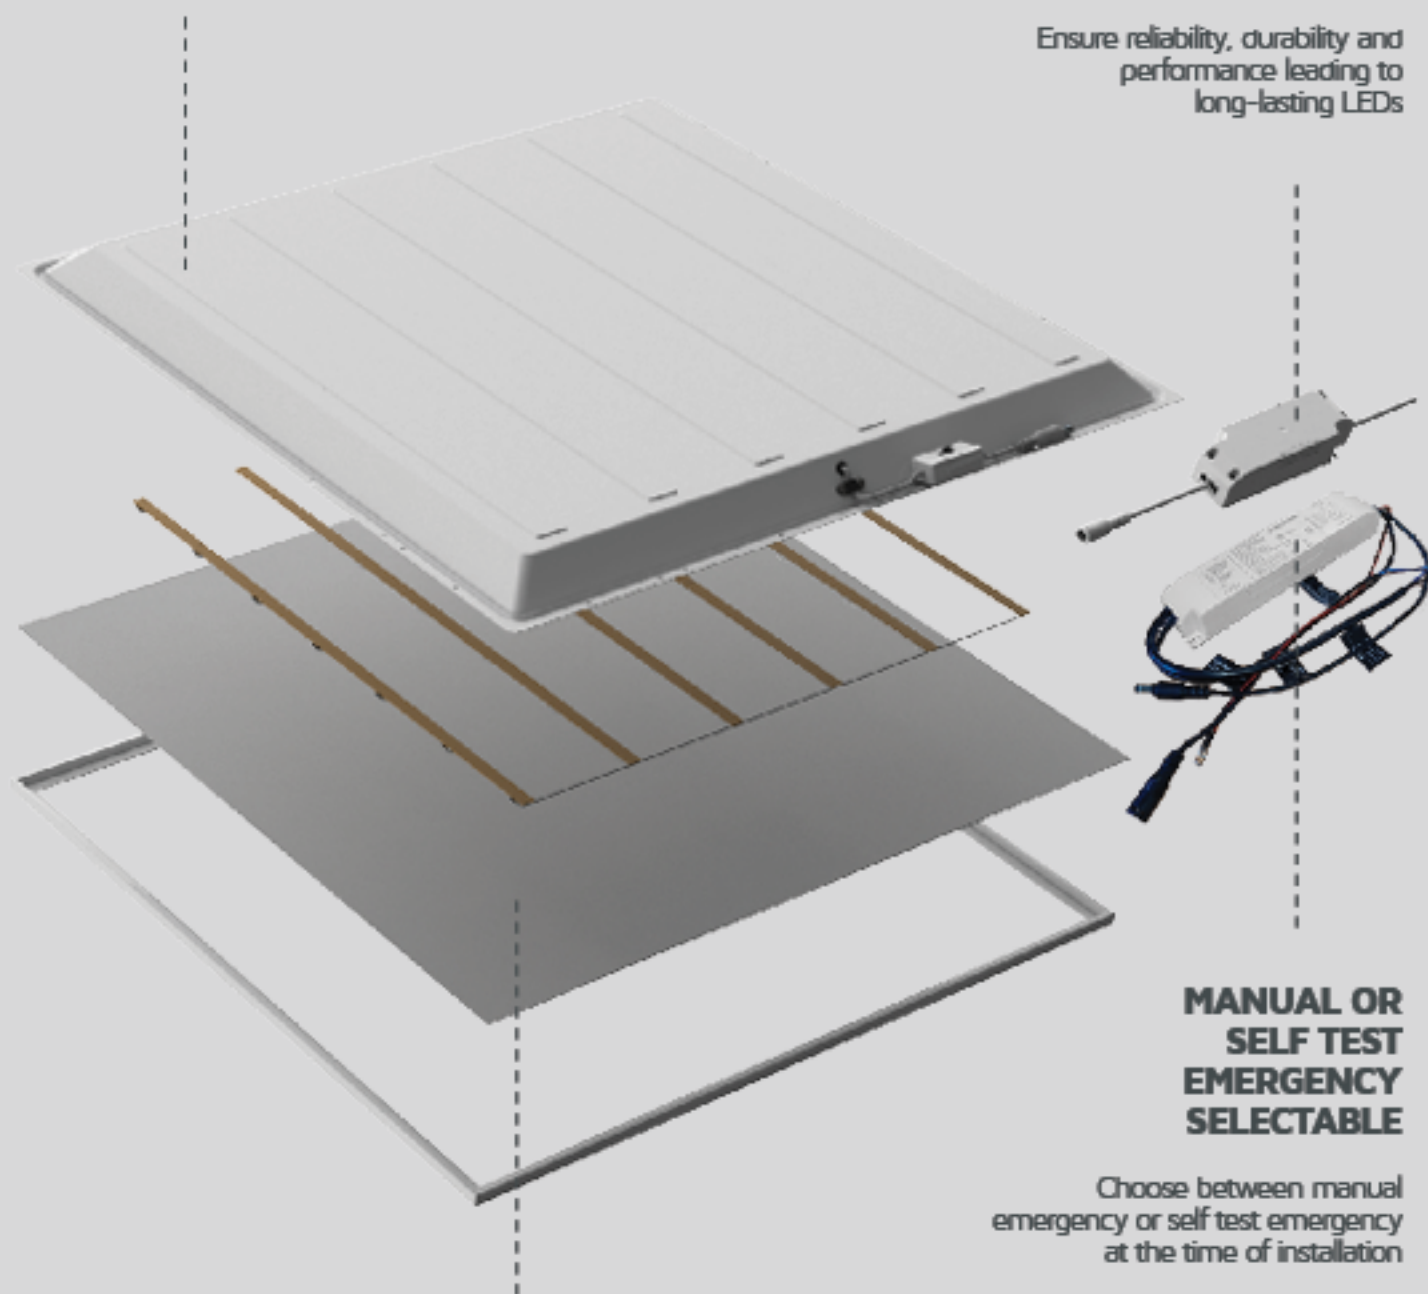

## MANUAL OR SELF TEST EMERGENCY SELECTABLE

Choose between manual emergency or self test emergency at the time of installation

*Emergency options only*

## LOW GLARE UGR<19 AND TP(A) FLAMMABILITY RATED DIFFUSER

Reduce headaches and comply with Building Regulations