

CAXTON DOWNLIGHT TRI-COLOUR 4" 7W TP(A) DIMMABLE DALI EMERGENCY

NET-49-05-24


**DALI Addressable
Emergency Kit**
Save time with seamless testing and monitoring for emergency lighting systems

**3 Hour
Emergency
operation**
The integral Emergency Battery ensures the fitting stays on in the event of an emergency or power failure - can be Self Test Emergency or standard 3H Emergency

Features & Benefits

- DALI Addressable Emergency function
- Ø120-130mm cut out size
- TP(a) flammability-rated diffuser
- Selectable 3000K, 4000K or 5500K colour temperature
- Shatterproof polycarbonate diffuser
- Stainless steel retaining clips

Key Data

| | |
|---------------------------|---------------------------------|
| Power | 7W |
| Luminous Flux | 700lm/750lm/700lm |
| Colour Temperature | 3000K/4000K/5500K |
| IP Rating | IP65 Front/IP20 Rear |
| Dimensions | Ø140 x 45mm |
| Warranty | 5 Years (Registration Required) |

Compatible Accessories

| | |
|--------------|--|
| NET-61-35-13 | Buckden Self Test Emergency Kit 3W for Panels and Downlights |
| NET-42-43-24 | DALI Dimmer Switch |
| NET-42-43-05 | Merrytek Ceiling Mount Microwave Sensor |

NET LED Lighting


 Buckingham Business Park, 300 Anderson Road,
 Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk


ORDER BY 6PM
 FOR NEXT DAY DELIVERY

Technical Specifications

| | |
|------------------------------|-------------------------|
| Input Voltage (AC) | 220-240V |
| Power Factor | >0.5 |
| Luminaire Efficacy | 105lm/W |
| LED Manufacturer | Hongliitronic |
| LED Type | SMD 2835 |
| No. of LEDs | 60 |
| Driver Manufacturer | Tridonic Premium Series |
| Driver Output Voltage (DC) | 23-40V |
| Total Circuit Power (W) | 7W |
| Electrical Class | 3 |
| Colour Rendering | >80 CRI |
| Lamp Viewing Angle | 110° |
| Dimmable | Yes |
| Flicker-Free | Yes |
| Operating Temp. | 0°C to +45°C |
| Lifespan LM80 | 50,000 Hours |
| Diffuser Flammability Rating | TP(a) |
| UGR Rating | More than 19 |
| Weight | 0.37Kg |
| Manufacturer | CREP Optoelectronics |
| Hours Maintained | 3H |
| Luminous Flux Factor | 43% |
| Self Test | No |
| Cut-Out Size | ø120-130mm |
| Housing Colour | White |
| Housing Material | Aluminium |
| Battery Pack | LiFePO4 3.2V 4.5Ah |
| Dimming Input Type | DALI Addressable |
| Emergency Kit | 3 Year Warranty |
| Emergency Operation | >3H |
| Emergency Pack | DALI Addressable |

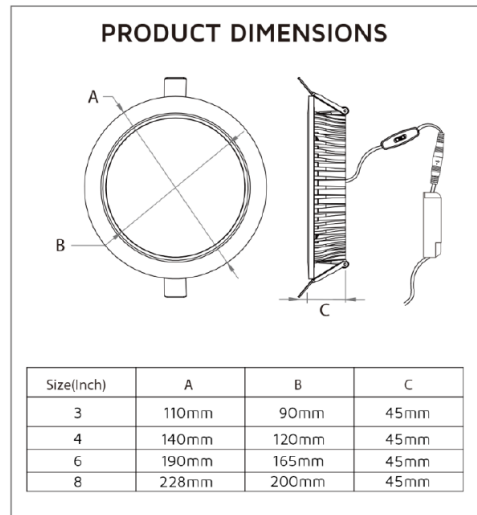

Other Options

| Description | |
|--------------|--|
| NET-49-05-72 | Caxton Downlight Tri-Colour 4" 7W TP(a) Standard |
| NET-49-05-77 | Caxton Downlight Tri-Colour 4" 7W TP(a) Emergency/Self Test |
| NET-49-05-21 | Caxton Downlight Tri-Colour 4" 7W TP(a) Dimmable one4all |
| NET-49-05-22 | Caxton Downlight Tri-Colour 4" 7W TP(a) Dimmable Emergency/Self Test |
| NET-49-05-24 | Caxton Downlight Tri-Colour 4" 7W TP(a) Dimmable DALI Emergency |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Ø90-210MM CUT-OUT SIZES

Available in 3", 4", 6" and 8",
these downlights are designed
to fit most existing holes

STAINLESS STEEL RETAINING CLIPS


Quick and simple installation
with no need for additional
tools



TRIDONIC DIMMABLE DRIVER

Customise lighting levels and
reduce electricity consumption

Dimmable options only




TP(A) FLAMMABILITY RATED DIFFUSER

Comply with Building Regulations
and prevent flaming particles




IP65 RATED FASCIA

Protect the downlight
from water and dust

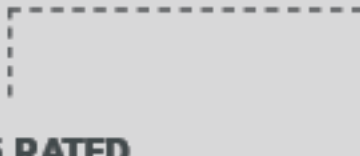

SHATTERPROOF POLYCARBONATE DIFFUSER

Designed to prevent
the diffuser shattering into
small, indistinct pieces

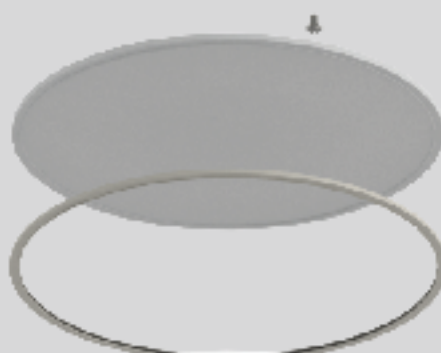

SELECTABLE COLOUR TEMPERATURE

Choose your colour
temperature 3000K,
4000K or 5500K



NEW

MANUAL OR SELF TEST EMERGENCY SELECTABLE

Choose between manual
emergency or self test
emergency at the time
of installation

Emergency options only

