



BOURNE NON-MAINTAINED EMERGENCY MINI DOWNLIGHT IP20 3W

NET-51-10-64



Features & Benefits

- Ø34mm cut-out size
- All control gear fits through downlight cut-out for easy installation
- Wide area lens

Key Data

Power	3W
Luminous Flux	140lm
Colour Temperature	6000K
IP Rating	IP20
Dimensions	Ø35 x 26mm
Warranty	3 Years

NET LED Lighting

Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	0.628
Luminaire Efficacy	47lm/W
Driver Manufacturer	Sealite Co. Ltd.
Total Circuit Power (w)	3W
Electrical Class	2
Colour Rendering	>70 CRI
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	5°C to +40°C
Lifespan LM80	50,000 Hours
Manufacturer	Sealite Co. Ltd.
Hours Maintained	3 Hours
Maintained	No
Self Test	No
Housing Colour	White and silver
Housing Material	Aluminium
Battery Pack	Ni-Cd 3.6V 1800mAh
Charge Time	24H
Emergency Operation	3H

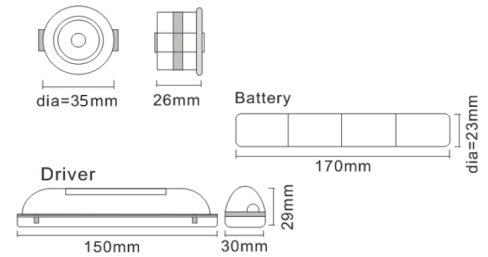

Other Options

Description	
NET-51-10-64	Bourne Non-Maintained Emergency Mini Downlight IP20 3W

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY