



HARLTON LOW BAY 5700K 120W MICROWAVE SENSOR EMERGENCY

NET-51-12-89

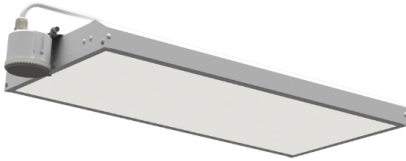

Features & Benefits

- High Power 20W Emergency function
- Microwave Dimming Sensor with up to 15m detection range (5-150lux)
- 0%, 10% or 25% Standby Mode
- Recommended for mounting at height between 4-8m
- Includes V-Bracket for suspension
- Tridonic driver as standard

Key Data

| | |
|---------------------------|---------------------------------|
| Power | 120W |
| Luminous Flux | 16000lm |
| Colour Temperature | 5700K |
| IP Rating | IP20 |
| Dimensions | 690 x 320 x 52.6mm |
| Warranty | 5 Years (Registration Required) |

Compatible Accessories

| | |
|--------------|--------------------------------------|
| NET-46-16-08 | Universal LED Low Bay Suspension Kit |
| NET-42-43-22 | Merrytek Remote Control for Sensors |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

| | |
|-------------------------|--------------------------|
| Input Voltage (AC) | 220-240V |
| Power Factor | >0.9 |
| Luminaire Efficacy | 130lm/W |
| LED Manufacturer | Runlite |
| LED Type | SMD 2835 |
| No. of LEDs | 756 |
| Driver Manufacturer | Tridonic Advanced Series |
| Total Circuit Power (W) | 120W +/- 5W |
| Electrical Class | 1 |
| Colour Rendering | >80 CRI |
| Lamp Viewing Angle | 120° |
| Dimmable | No |
| Operating Temp. | 0°C to +40°C |
| Lifespan LM80 | 80,000 Hours |
| UGR Rating | >22 |
| Weight | 2.5Kg |
| Manufacturer | Sealite Co. Ltd |
| Hours Maintained | 3H |
| Luminous Flux Factor | 16% |
| Max. Detection Distance | 15m |
| Self Test | No |
| Housing Colour | White |
| Housing Material | Aluminium |
| Battery Pack | LiFePO4 |
| Detection Angle | 360° |
| Diffuser Material | Polycarbonate |
| Emergency Kit | 1 Year Warranty |
| Emergency Operation | >3H |
| Emergency Pack | Streamer |
| Sensor Manufacturer | Sealite Co. Ltd. |
| Sensor IP Rating | IP65 |

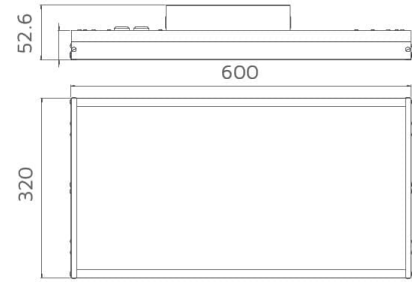

Other Options

| Description | |
|--------------|--|
| NET-51-12-96 | Harlton Low Bay 5700K 120W Standard |
| NET-51-12-86 | Harlton Low Bay 5700K 120W Emergency |
| NET-51-12-99 | Harlton Low Bay 5700K 120W Microwave Sensor |
| NET-51-12-89 | Harlton Low Bay 5700K 120W Microwave Sensor Emergency |
| NET-51-12-94 | Harlton Low Bay 5700K 120W PIR Sensor (up to 6m) |
| NET-51-12-84 | Harlton Low Bay 5700K 120W PIR Sensor Emergency (up to 6m) |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

130
lm/W

20W HIGH OUTPUT EMERGENCY OPERATION

Ensures the fitting comes on in
the event of a power failure

Emergency options only

MICROWAVE SENSOR AND PIR SENSOR OPTIONS AVAILABLE

Choose between a
Microwave Sensor with
0, 10 or 25% Standby
Mode with 15m
detection range, or a
PIR Sensor with
6m detection range

5700K COLOUR TEMPERATURE

Bright and crisp light best used
for industrial spaces

5.7K