


HARLTON LOW BAY 5700K 120W STANDARD

NET-51-12-96

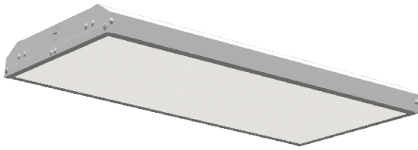

Features & Benefits

- Recommended for mounting at height between 4-8m
- Includes V-Bracket for suspension
- Tridonic driver as standard
- 5700K colour temperature

Key Data

Power	120W
Luminous Flux	16000lm
Colour Temperature	5700K
IP Rating	IP20
Dimensions	600 x 320 x 52.6mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-46-16-08	Universal LED Low Bay Suspension Kit
--------------	--------------------------------------

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	130lm/W
LED Manufacturer	Runlite
LED Type	SMD 2835
No. of LEDs	756
Driver Manufacturer	Tridonic Advanced Series
Total Circuit Power (W)	120W +/- 5W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	0°C to +40°C
Lifespan LM80	80,000 Hours
UGR Rating	>22
Weight	2.5Kg
Manufacturer	Sealite Co. Ltd
Housing Colour	White
Housing Material	Aluminium
Diffuser Material	Polycarbonate

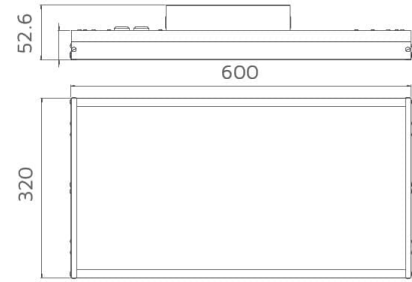

Other Options

Description	
NET-51-12-96	Harlton Low Bay 5700K 120W Standard
NET-51-12-86	Harlton Low Bay 5700K 120W Emergency
NET-51-12-99	Harlton Low Bay 5700K 120W Microwave Sensor
NET-51-12-89	Harlton Low Bay 5700K 120W Microwave Sensor Emergency
NET-51-12-94	Harlton Low Bay 5700K 120W PIR Sensor (up to 6m)
NET-51-12-84	Harlton Low Bay 5700K 120W PIR Sensor Emergency (up to 6m)

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

130
lm/W

20W HIGH OUTPUT EMERGENCY OPERATION

Ensures the fitting comes on in
the event of a power failure

Emergency options only

MICROWAVE SENSOR AND PIR SENSOR OPTIONS AVAILABLE

Choose between a
Microwave Sensor with
0, 10 or 25% Standby
Mode with 15m
detection range, or a
PIR Sensor with
6m detection range

5700K COLOUR TEMPERATURE

Bright and crisp light best used
for industrial spaces

5.7K