


ELY LOUVRE HEAD BOLLARD TRI-COLOUR 22W EMERGENCY

NET-53-14-10




**3 Hour
Emergency
operation**

The integral Emergency Battery ensures the fitting stays on in the event of an emergency or power failure



Tri-Colour

Choose your colour temperature (3000K, 4000K or 6000K) at the time of installation



Features & Benefits

- 3H Emergency operation
- Selectable 3000K, 4000K or 6000K colour temperature
- White reflector helps distribute the light evenly and reduce glare
- Weatherproof connector protects the wiring from water and moisture
- IK09 rated housing
- Optional Anchor Mounting Kit available

Key Data

| | |
|---------------------------|-------------------|
| Power | 22W |
| Luminous Flux | 2000lm |
| Colour Temperature | 3000K/4000K/6000K |
| IP Rating | IP65 |
| IK Rating | IK08 |
| Dimensions | Ø160 x 1000mm |
| Warranty | 3 Years |

Compatible Accessories

| | |
|--------------|--------------------------|
| NET-53-14-08 | Root J Bolt Mounting Kit |
|--------------|--------------------------|

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

| | |
|----------------------------|------------------------|
| Input Voltage (AC) | 220-240V |
| Power Factor | >0.90 |
| Luminaire Efficacy | 90-100lm/W |
| LED Manufacturer | Duris |
| LED Type | SMD 2835 |
| Driver Manufacturer | BOKE |
| Driver Output Voltage (DC) | 28-38V |
| Total Circuit Power (W) | 22W |
| Electrical Class | 1 |
| Colour Rendering | >80 CRI |
| Lamp Viewing Angle | 180° |
| Dimmable | No |
| Operating Temp. | -25°C to +40°C |
| Lifespan LM80 | 50,000 Hours |
| Weight | 5.8Kg |
| Manufacturer | Kingsway Lighting Ltd. |
| Hours Maintained | 3H |
| Photocell Compatible | No |
| Self Test | No |
| Housing Colour | Black |
| Housing Material | Aluminium |
| Diffuser Material | Acrylic |
| Emergency Kit | 3 Year Warranty |
| Emergency Operation | >3H |

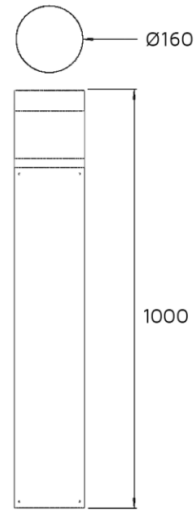

Other Options

| Description | |
|--------------|--|
| NET-53-14-06 | Ely Louvre Head Bollard Tri-Colour 22W Standard |
| NET-53-14-11 | Ely Louvre Head Bollard Tri-Colour 22W Photocell |
| NET-53-14-10 | Ely Louvre Head Bollard Tri-Colour 22W Emergency |
| NET-53-14-12 | Ely Louvre Head Bollard Tri-Colour 22W Photocell Emergency |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

DOME HEAD OR LOUVRE REFLECTOR AVAILABLE

Choose between diffused, ambient lighting with a Dome Head or directed, controlled lighting with the Louvre Reflector



SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 3000K, 4000K or 6000K

WHITE REFLECTOR

Help distribute the light evenly and reduce glare

3H EMERGENCY OPERATION

Ensures the fitting comes on in the event of a power failure

Emergency options only

WEATHERPROOF CONNECTOR

Protect your wiring from water and moisture

DUSK TO DAWN FUNCTION

Detects ambient light levels and adjusts the light accordingly

Photocell options only

IK10 RATED HOUSING

Protect your bollard from impact with its durable, aluminium outer sleeve

