


ARBURY MULTI-WATTAGE HIGH BAY 4000K

NET-53-20-02



Features & Benefits

- Selectable power setting (85W, 100W, 150W or 200W) at the time of installation
- IP65 and IK09 rated housing
- Optional Microwave Sensor available
- Optional 3H Emergency Kit available

Key Data

Power	85W/100W/150W/200W
Luminous Flux	16900lm/24600lm/30900lm
Colour Temperature	4000K
IP Rating	IP65
IK Rating	IK08
Dimensions	Ø300 x 97mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-53-20-04	Microwave Sensor for Arbury Multi-Wattage High Bays
NET-53-20-06	Remote Control for Arbury Microwave Sensor
NET-53-20-08	Emergency Kit for Arbury Multi-Wattage High Bays
NET-61-35-10	Buckden Remote Control for Self Test EM Signage

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
 Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
 FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	100-277V
Power Factor	>0.95
Luminaire Efficacy	155lm/W
LED Manufacturer	Smalite
LED Type	SMD 2835
No. of LEDs	364
Driver Manufacturer	Changhong
Driver Output Voltage (DC)	120V
Total Circuit Power (W)	85W/100W/150W/200W
Electrical Class	1
Colour Rendering	80Ra
Lamp Viewing Angle	90°
Dimmable	Yes
Operating Temp.	-40°C to +50°C
Lifespan LM80	50,000 Hours
UGR Rating	>19
Weight	2.1Kg
Manufacturer	Kingsway Lighting
Fire Rating	V0
Housing Colour	Black
Housing Material	Aluminium
Diffuser Material	PC
Dimming Input Type	1-10V as Standard

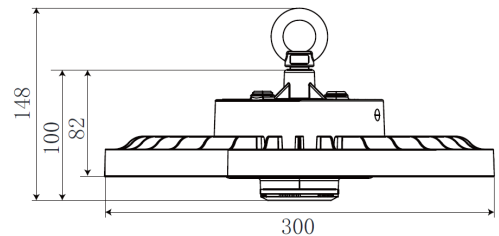

Other Options

Description	
NET-53-20-02	Arbury Multi-Wattage High Bay 4000K

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

CENTRAL MOUNTED HOOK

Suspend your High Bay
or purchase an optional
Mounting Bracket

SELECTABLE POWER SETTING

Choose between 85W, 100W,
150W or 200W

4K

4000K COLOUR TEMPERATURE

Enhance focus and productivity
in work environments

OPTIONAL MICROWAVE SENSOR AVAILABLE

Featuring up to 13m detection range, a
hold time of 3 seconds to 30 minutes, and
a Standby Mode of 10, 20, 30 or 50%

IP65 AND IK09 RATED HOUSING

Protect your High Bay from
water, dust and impact with its
durable and highly transparent PC cover