

CARLTON T5 DALI TUBE 4000K (3FT) 12W (EXC. DRIVER)

NET-55-01-02







Key Data

Power 12W
Luminous Flux 1560Im
Colour Temperature 4000K
IP Rating IP20

Dimensions 863.2 x 22mm

Warranty 5 Years (Registration Required)

Compatible Accessories

NET-61-33-01	Foxlux Self Test Emergency Kit 5W
NET-50-12-10	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-50-33-01	Streamer 3H Emergency Kit 4.5W
NET-19-33-17	Liteplan DALI Emergency Kit 5W
NET-55-16-02	LED Tube Replacement Starter

NET LED Lighting

Buckingway Business Park, 300 Anderson Road, Swavesey, Cambridge, CB24 4UQ



Technical Specifications

Power Factor>0.95LED ManufacturerSananLED TypeSMD 2835Total Circuit Power (W)12WElectrical Class2Colour Rendering>80 CRI

DimmableYes (requires Driver)Operating Temp.-15°C to +45°CLifespan LM8050,000 Hours


120°

UGR Rating 22

Manufacturer Wiscoon Tech Co. Ltd.

Fire Rating V2
Housing Colour White
Housing Material Aluminium
Diffuser Material Polycarbonate

Dimming Input Type DALI



Other Options


Lamp Viewing Angle

	Description
NET-55-01-14	Carlton T5 DALI Tube 4000K (3ft) 12W (inc. Driver 66V @ 150mA)
NET-55-01-02	Carlton T5 DALI Tube 4000K (3ft) 12W (exc. Driver)
NET-55-01-16	Carlton T5 DALI Tube 4000K (4ft) 16W (inc. Driver 66V @ 200mA)
NET-55-01-04	Carlton T5 DALI Tube 4000K (4ft) 16W (exc. Driver)
NET-55-01-18	Carlton T5 DALI Tube 4000K (5ft) 20W (inc. Driver 66V @ 250mA)
NET-55-01-06	Carlton T5 DALI Tube 4000K (5ft) 20W (exc. Driver)

NET LED Lighting

Buckingway Business Park, 300 Anderson Road, Swavesey, Cambridge, CB24 4UQ



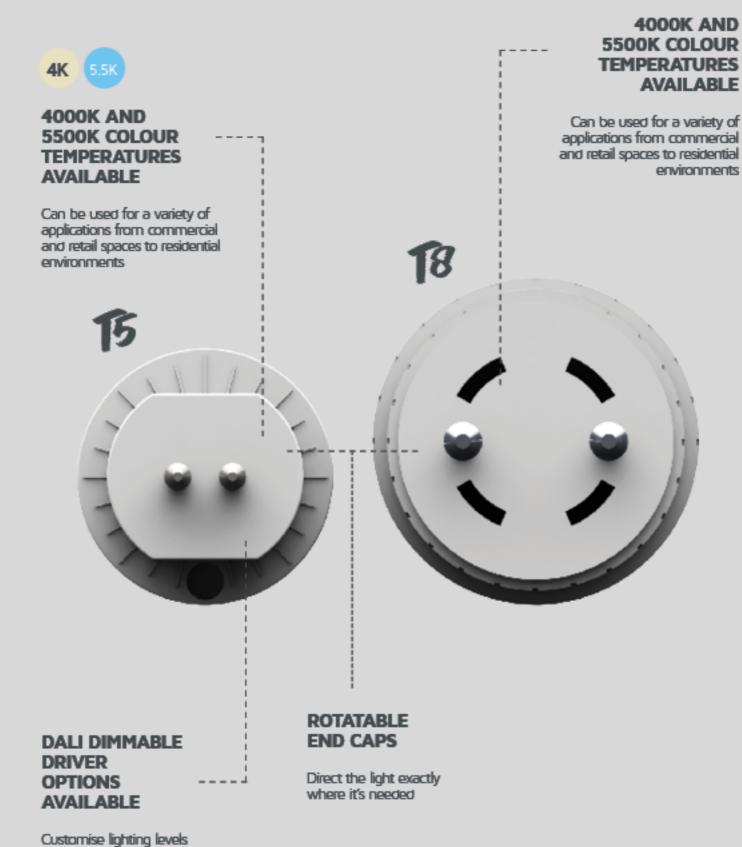

and reduce electricity

DALI options only

consumption