

KINGSTON DOWNLIGHT UGR<19 4000K 8" 35W DIMMABLE ONE4ALL

NET-60-05-28



Features & Benefits

- Tridonic one4all Dimming - DALI 1 & 2 and switchDIM (Push)
- Low glare diffuser with UGR<19
- Ø190-210mm cut out size
- Single colour temperature 4000K

Key Data

Power	35W
Luminous Flux	3180lm
Colour Temperature	4000K
IP Rating	IP20
Dimensions	ø218 x 106 x 98mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-50-12-08	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-61-33-03	DALI Emergency Kit 3W

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V AC
Power Factor	0.95
Luminaire Efficacy	107lm/W
LED Manufacturer	Tridonic
No. of LEDs	60
Driver Manufacturer	Tridonic Premium Series
Driver Output Voltage (DC)	37.5V
Total Circuit Power (w)	30W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	60°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	-15°C to +40°C
Lifespan LM80	50,000 Hours
UGR Rating	Less than 19
Weight	0.252Kg
Manufacturer	Tridonic
Cut-Out Size	ø190-210mm
Housing Colour	White
Housing Material	Aluminium
Dimming Input Type	Tridonic one4all Dimming - DALI 1 & 2 and switchDIM (Push)

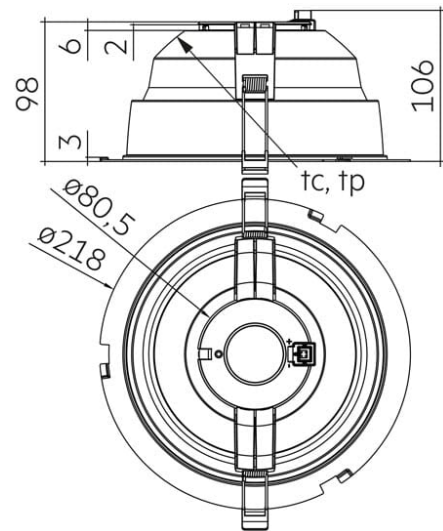

Other Options

Description	
NET-60-05-26	Kingston Downlight UGR<19 4000K 8" 35W Standard
NET-60-05-27	Kingston Downlight UGR<19 4000K 8" 35W Emergency/Self Test
NET-60-05-28	Kingston Downlight UGR<19 4000K 8" 35W Dimmable one4all
NET-60-05-29	Kingston Downlight UGR<19 4000K 8" 35W Dimmable Emergency/Self Test
NET-60-05-30	Kingston Downlight UGR<19 4000K 8" 35W Dimmable DALI Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

NEW

STAINLESS STEEL RETAINING CLIPS

Quick and simple installation
with no need for additional tools

Ø145-210MM CUT-OUT SIZES

Available in 6" and 8",
these downlights are designed
to fit existing holes

MANUAL OR SELF TEST EMERGENCY SELECTABLE

Choose between manual
emergency or self test emergency
at the time of installation

Emergency options only

LOW GLARE UGR<19 RATED DIFFUSER

Reduce headaches and
improve focus

TRIDONIC DIMMABLE DRIVER

Customise lighting levels and
reduce electricity consumption

Dimmable options only

