


28000660 TRIDONIC LC 75W 900-1800MA ONE4ALL IP PRE

PRD-70-10-02

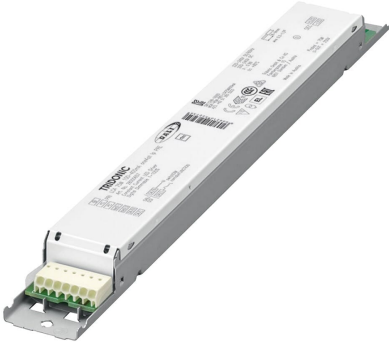

### Features & Benefits

- Max. output power 75W
- Supports a current range from 900-1800mA
- Compatible with both DALI and 1-10V dimming systems
- Equipped with thermal management

### Key Data

<b>Power</b>	75W
<b>IP Rating</b>	IP20
<b>Dimensions</b>	360 x 30 x 21mm
<b>Warranty</b>	5 Years (Registration Required)

### NET LED Lighting

Buckingway Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Driver Output Voltage (DC)	176-280V
Dimmable	Yes
Operating Temp.	-25°C to +55°C
Lifespan LM80	<100,000 Hours
Manufacturer	Tridonic
Output Current	900-1800mA
Output Power	45-75W
Output Voltage	20-50V
Power Frequency	50/60Hz
Housing Colour	White
Housing Material	Aluminium
Dimming Input Type	one4all Dimming - DALI 1 & 2 and switchDIM
Dimming Range	1-100%

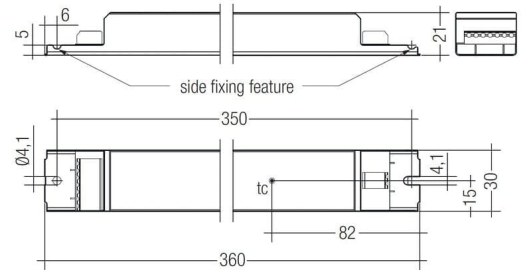

## Other Options

Description	
PRD-70-10-02	28000660 Tridonic LC 75W 900-1800mA one4all IP PRE

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk