

28000665 TRIDONIC LCA 25W 350-1050MA ONE4ALL C PRE

PRD-70-10-07



Features & Benefits

- Provides up to 25W of power
- Current range of 350-1050mA
- Compatible with multiple dimming protocols, including DALI, DSI, switchDIM, and 1-10V
- Thermal protection
- Ensures smooth, flicker-free light activation

Key Data

Power	25W
IP Rating	IP20
Dimensions	120 x 70 x 22.3mm
Warranty	5 Years (Registration Required)

NET LED Lighting

Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Driver Output Voltage (DC)	176-280V
Dimmable	Yes
Operating Temp.	-25°C to +60°C
Lifespan LM80	<100,000 Hours
Manufacturer	Tridonic
Output Current	350-1050mA
Output Power	17.5-25W
Output Voltage	20-50V
Power Frequency	50/60Hz
Housing Colour	White
Housing Material	Polycarbonate
Dimming Input Type	one4all Dimming - DALI 1 & 2 and switchDIM
Dimming Range	1-100%

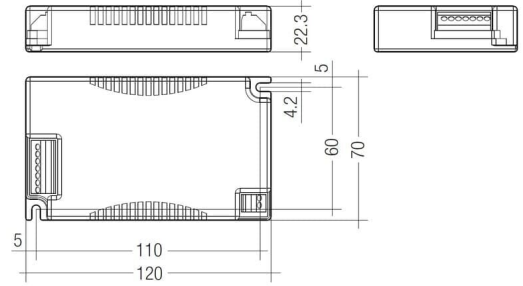

Other Options

Description	
PRD-70-10-07	28000665 Tridonic LCA 25W 350-1050mA one4all C PRE

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk