

87500500 TRIDONIC LC 57W 800-1050MA FLEXC IP ADV

PRD-70-10-81



Features & Benefits

- Delivers up to 57W
- Current range of 800-1050mA
- Provides flicker-free lighting control
- Thermal management

Key Data

Power	57W
IP Rating	IP20
Dimensions	230 x 30 x 21mm
Warranty	5 Years (Registration Required)

NET LED Lighting

Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Driver Output Voltage (DC)	176-280V
Dimmable	No
Operating Temp.	-25°C to +55°C
Lifespan LM80	<100,000 Hours
Manufacturer	Tridonic
Output Current	800-1050mA
Output Power	43.2-57W
Output Voltage	20-54V
Power Frequency	50/60Hz
Housing Colour	White
Housing Material	Aluminium

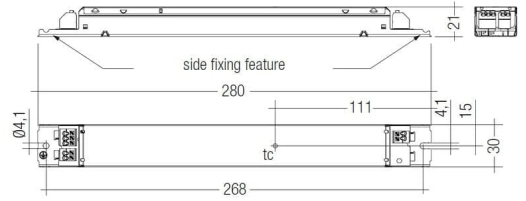

Other Options

Description	
PRD-70-10-81	87500500 Tridonic LC 57W 800-1050mA flexC Ip ADV

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk