

## FOXTON BATTEN TRI-COLOUR 1800MM (6FT) 75W MICROWAVE SENSOR ON/OFF

NET-41-11-27



### Features & Benefits

- 3H Emergency function
- On/Off Microwave Sensor ensures the fitting only comes on when movement is detected
- Selectable colour temperature 3000K, 4000K or 5700K
- Rear or end cable entry
- Tridonic driver as standard
- Push connector for quick and easy installation

### Key Data

<b>Power</b>	75W
<b>Luminous Flux</b>	9750lm
<b>Colour Temperature</b>	3000K/4000K/5700K
<b>IP Rating</b>	IP20
<b>IK Rating</b>	IK04
<b>Dimensions</b>	1820 x 63 x 73mm
<b>Warranty</b>	5 Years (Registration Required)

### Compatible Accessories

NET-46-16-04	Universal LED NCF / Batten Suspension Kit
--------------	---

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	640
Driver Manufacturer	Tridonic Advanced Series
Driver Output Voltage (DC)	20-54V
Total Circuit Power (W)	75W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Manufacturer	Senselight
Fire Rating	V2
Hours Maintained	3H
Lux Levels	5lux-150lux or Disabled
Max. Detection Distance	12m
Self Test	No
Housing Colour	White
Housing Material	Steel
Battery Pack	LiFePO4
Detection Angle	150° (wall mount) / 360° (ceiling mount)
Diffuser Material	Polycarbonate
Duration	5s-30min
Emergency Kit	3 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer
Sensor Manufacturer	Merrytek
Sensor IP Rating	IP20

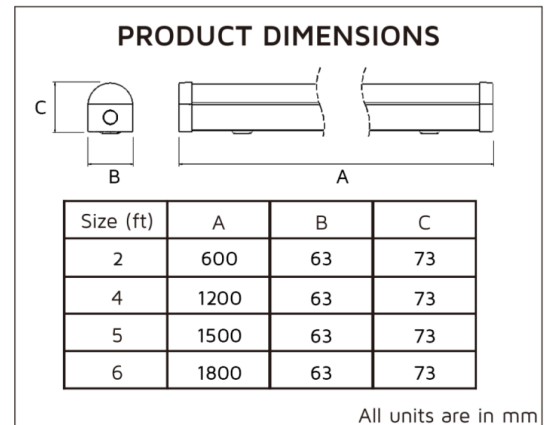

## Other Options

Description	
NET-41-11-10	Foxtton Batten Tri-Colour 1800mm (6ft) 75W Standard
NET-41-11-99	Foxtton Batten Tri-Colour 1800mm (6ft) 75W Emergency
NET-41-12-99	Foxtton Batten Tri-Colour 1800mm (6ft) 75W Self Test Emergency
NET-41-11-17	Foxtton Batten Tri-Colour 1800mm (6ft) 75W Dimmable one4all
NET-41-11-18	Foxtton Batten Tri-Colour 1800mm (6ft) 75W Dimmable Emergency
NET-41-11-23	Foxtton Batten Tri-Colour 1800mm (6ft) 75W Dimmable DALI Emergency
NET-41-11-24	Foxtton Batten Tri-Colour 1800mm (6ft) 75W PIR Sensor On/Off
NET-41-11-25	Foxtton Batten Tri-Colour 1800mm (6ft) 75W PIR Sensor On/Off Emergency
NET-41-11-26	Foxtton Batten Tri-Colour 1800mm (6ft) 75W Microwave Sensor On/Off
NET-41-11-27	Foxtton Batten Tri-Colour 1800mm (6ft) 75W Microwave Sensor On/Off Emergency

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

**COMBINED DIFFUSER AND LEDS**

Stop juggling multiple parts and install a diffuser that comes with built-in LEDs

**FLICKER-FREE TRIDONIC DIMMABLE DRIVER**

Ensure reliability, durability and performance leading to long-lasting LEDs

*Dimmable options only*

**NEW**

**MANUAL OR SELF TEST EMERGENCY SELECTABLE**

Choose between manual emergency or self test emergency at the time of installation

*Emergency options only*

**REAR OR END CABLE ENTRY**

Create seamless end-to-end lighting designs

**WIRELESS CONTROL**

Control the panel remotely via smartphone or tablet with it's Bluetooth Dimmable Driver

*Bluetooth options only*

**SELECTABLE COLOUR TEMPERATURE**

Choose your colour temperature 3000K, 4000K or 5700K

3K

4K

5.7K

