

# FOXTON BATTEN TRI-COLOUR 1800MM (6FT) 35W PIR SENSOR ON/OFF EMERGENCY

NET-41-11-63







## Features & Benefits

- 3H Emergency function
- On/Off PIR Sensor ensures the fitting only comes on when heat signatures are detected
- Selectable colour temperature 3000K, 4000K or 5700K
- · Rear or end cable entry
- · Tridonic driver as standard
- Push connector for quick and easy installation

## **Key Data**

Power 35W Luminous Flux 4550lm

Colour Temperature 3000K/4000K/5700K

IP Rating IP20
IK Rating IK04

**Dimensions** 1820 x 63 x 73mm

Warranty 5 Years (Registration Required)

#### Compatible Accessories

	-	
Ι	NET-46-16-04	Universal LED NCF / Batten Suspension Kit

**NET LED Lighting** 

Buckingway Business Park, 300 Anderson Road, Swavesey, Cambridge, CB24 4UQ



### **Technical Specifications**

**Driver Output Voltage (DC)** 

Input Voltage (AC) 220-240V

Power Factor >0.90

Luminaire Efficacy 130Im/W

LED Manufacturer Jingrui

LED Type SMD 2835

No. of LEDs 352

**Driver Manufacturer** Tridonic Advanced Series

20-54V

Total Circuit Power (W) 35W

Electrical Class 1

Colour Rendering >80 CRI

Lamp Viewing Angle 120°

Dimmable No

Flicker-Free Yes

Operating Temp. 0 °C to +45 °C
Lifespan LM80 50,000 Hours
UGR Rating More than 22
Manufacturer Senselight

Fire Rating V2 Hours Maintained 3H


Lux Levels <3lux-2000lux (adjustable)

Self Test No
Housing Colour White
Housing Material Steel
Battery Pack LiFePO4
Detection Angle 360°

Diffuser MaterialPolycarbonateDuration10s-30minEmergency Kit3 Year Warranty

Emergency Operation>3HEmergency PackStreamerSensor ManufacturerSealite Co. Ltd.

Sensor IP Rating IP65



#### Other Options


	Description	
NET-41-11-97	Foxton Batten Tri-Colour 1800mm (6ft) 35W Standard	
NET-41-11-98	Foxton Batten Tri-Colour 1800mm (6ft) 35W Emergency	
NET-41-12-98	Foxton Batten Tri-Colour 1800mm (6ft) 35W Self Test Emergency	
NET-41-11-15	Foxton Batten Tri-Colour 1800mm (6ft) 35W Dimmable one4all	
NET-41-11-16	Foxton Batten Tri-Colour 1800mm (6ft) 35W Dimmable Emergency	
NET-41-11-61	Foxton Batten Tri-Colour 1800mm (6ft) 35W Dimmable DALI Emergency	
NET-41-11-62	Foxton Batten Tri-Colour 1800mm (6ft) 35W PIR Sensor On/Off	
NET-41-11-63	Foxton Batten Tri-Colour 1800mm (6ft) 35W PIR Sensor On/Off Emergency	
NET-41-11-64	Foxton Batten Tri-Colour 1800mm (6ft) 35W Microwave Sensor On/Off	
NET-41-11-65	Foxton Batten Tri-Colour 1800mm (6ft) 35W Microwave Sensor On/Off Emergency	

#### **NET LED Lighting**

Buckingway Business Park, 300 Anderson Road, Swavesey, Cambridge, CB24 4UQ





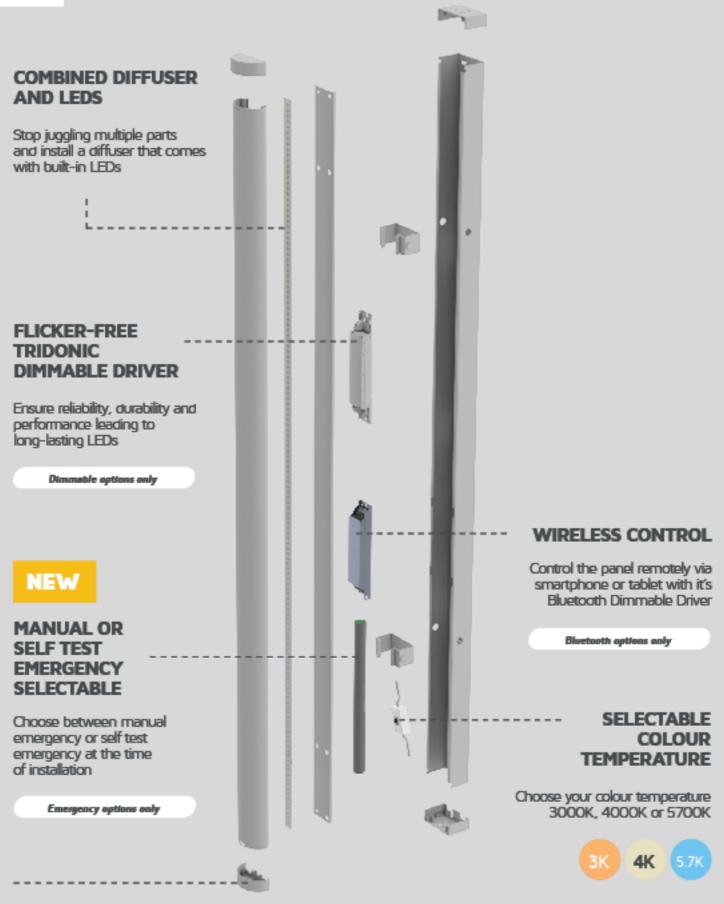

## REAR OR END CABLE ENTRY

Create seamless end-to-end lighting designs