

FOXTON BATTEN TRI-COLOUR 1200MM (4FT) 20W MICROWAVE SENSOR ON/OFF
NET-41-11-76

Features & Benefits

- 3H Emergency function
- On/Off Microwave Sensor ensures the fitting only comes on when movement is detected
- Selectable colour temperature 3000K, 4000K or 5700K
- Rear or end cable entry
- Tridonic driver as standard
- Push connector for quick and easy installation

Key Data

Power	20W
Luminous Flux	2600lm
Colour Temperature	3000K/4000K/5700K
IP Rating	IP20
IK Rating	IK04
Dimensions	1240 x 100 x 85mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-61-33-03	DALI Emergency Kit 3W
NET-46-16-04	Universal LED NCF / Batten Suspension Kit

NET LED Lighting


 Buckingham Business Park, 300 Anderson Road,
 Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

ORDER BY 6PM
 FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	240
Driver Manufacturer	Tridonic Advanced Series
Driver Output Voltage (DC)	20-54V
Total Circuit Power (W)	20W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Manufacturer	Senselight
Fire Rating	V2
Hours Maintained	3H
Lux Levels	5lux-150lux or Disabled
Max. Detection Distance	12m
Self Test	No
Housing Colour	White
Housing Material	Steel
Battery Pack	LiFePO4
Detection Angle	150° (wall mount) / 360° (ceiling mount)
Diffuser Material	Polycarbonate
Duration	5s-30min
Emergency Kit	3 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer
Sensor Manufacturer	Merrytek
Sensor IP Rating	IP20

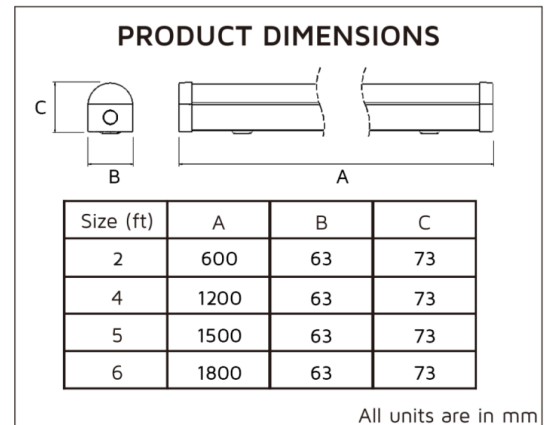

Other Options

Description	
NET-41-11-91	Foxtton Batten Tri-Colour 1200mm (4ft) 20W Standard
NET-41-11-92	Foxtton Batten Tri-Colour 1200mm (4ft) 20W Emergency
NET-41-12-92	Foxtton Batten Tri-Colour 1200mm (4ft) 20W Self Test Emergency
NET-41-11-08	Foxtton Batten Tri-Colour 1200mm (4ft) 20W Dimmable one4all
NET-41-11-09	Foxtton Batten Tri-Colour 1200mm (4ft) 20W Dimmable Emergency
NET-41-11-72	Foxtton Batten Tri-Colour 1200mm (4ft) 20W Dimmable DALI Emergency
NET-41-11-73	Foxtton Batten Tri-Colour 1200mm (4ft) 20W PIR Sensor On/Off
NET-41-11-74	Foxtton Batten Tri-Colour 1200mm (4ft) 20W PIR Sensor On/Off Emergency
NET-41-11-75	Foxtton Batten Tri-Colour 1200mm (4ft) 20W Microwave Sensor On/Off
NET-41-11-76	Foxtton Batten Tri-Colour 1200mm (4ft) 20W Microwave Sensor On/Off Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

COMBINED DIFFUSER AND LEDS

Stop juggling multiple parts and install a diffuser that comes with built-in LEDs

FLICKER-FREE TRIDONIC DIMMABLE DRIVER

Ensure reliability, durability and performance leading to long-lasting LEDs

Dimmable options only

NEW

MANUAL OR SELF TEST EMERGENCY SELECTABLE

Choose between manual emergency or self test emergency at the time of installation

Emergency options only

REAR OR END CABLE ENTRY

Create seamless end-to-end lighting designs

WIRELESS CONTROL

Control the panel remotely via smartphone or tablet with it's Bluetooth Dimmable Driver

Bluetooth options only

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 3000K, 4000K or 5700K

3K

4K

5.7K