



## MARCH LINEAR LIGHT BAR TRI-COLOUR 1200MM (4FT) 36W SELF TEST EMERGENCY

NET-43-11-34

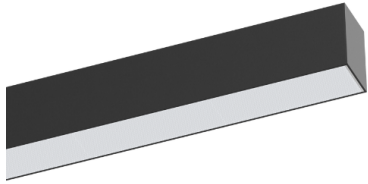


**Self Test Emergency operation**

Save time and money with a fitting that carries out its own testing in line with relevant standards



**Tri-Colour**

Choose your colour temperature (3000K, 4000K or 5700K) at the time of installation



### Features & Benefits

- Self Test Emergency Function
- 3H Emergency function
- Multiple mounting options including wall mount, recessed, surface mount and suspension
- Selectable 3000K, 4000K or 5700K colour temperature
- Optional Straight and L Shape
- Non-Illuminated Corner Connectors for multiple shaped designs

### Key Data

<b>Power</b>	36W
<b>Luminous Flux</b>	3700lm/3800lm/4000lm
<b>Colour Temperature</b>	3000K/4000K/5700K
<b>IP Rating</b>	IP40
<b>IK Rating</b>	IK06
<b>Dimensions</b>	1204 x 56 x 75mm
<b>Warranty</b>	5 Years (Registration Required)

### Compatible Accessories

NET-43-11-40	Straight Link Connector for March Linear Light Bars
NET-43-11-42	L Shape Non-Illuminated Corner Connector for March Linear Light Bars
NET-43-11-44	Suspension Wire Kit for March Linear Light Bars
NET-43-11-46	Wall Mounting Kit for March Linear Light Bars
NET-43-11-48	Recessed Mounting Kit for March Linear Light Bars

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	109lm/W
LED Type	SMD 2835
Driver Manufacturer	BOKE
Driver Output Voltage (DC)	33-42V
Total Circuit Power (W)	36W +/- 5W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temp.	-20°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	Less than 19
Weight	2.75Kg
Manufacturer	Sochii Lighting
Self Test	Yes
Housing Colour	Black
Housing Material	Aluminium
Diffuser Material	PC
Emergency Kit	1 Year Warranty
Emergency Operation	>3H

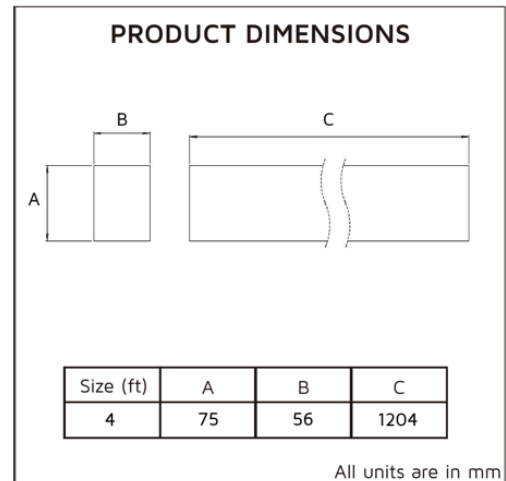

## Other Options

Description	
NET-43-11-30	March Linear Light Bar Tri-Colour 1200mm (4ft) 36W Standard
NET-43-11-32	March Linear Light Bar Tri-Colour 1200mm (4ft) 36W Emergency
NET-43-11-34	March Linear Light Bar Tri-Colour 1200mm (4ft) 36W Self Test Emergency
NET-43-11-36	March Linear Light Bar Tri-Colour 1200mm (4ft) 36W Dimmable
NET-43-11-38	March Linear Light Bar Tri-Colour 1200mm (4ft) 36W Dimmable Emergency
NET-43-11-39	March Linear Light Bar Tri-Colour 1200mm (4ft) 36W Dimmable DALI Emergency

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

**NEW**

**MANUAL OR SELF TEST EMERGENCY SELECTABLE**

Choose between manual emergency or self test emergency at the time of installation

*Emergency options only*

3K

4K

5.7K

**SELECTABLE COLOUR TEMPERATURE**

Choose your colour temperature 3000K, 4000K or 5700K

**REAR OR END CABLE ENTRY**

Create seamless end-to-end lighting designs

**LOW GLARE RATED UGR<19**

Reduce headaches and improve focus

**DIMMABLE DRIVER**

Customise lighting levels and reduce electricity consumption

*Dimmable options only*

**PUSH CONNECTOR**

Reduce installation time with easy-to-use push fit terminals

