


CARLTON T8 TUBE 3000K 1800MM (6FT) 22W


NET-55-02-15


3 colour temperatures available

3000K, 4000K and 5500K colour temperatures available for a variety of applications


Rotatable end caps

Direct the light exactly where it's needed


Features & Benefits

- Rotatable end caps
- Single colour temperature 3000K

Key Data

Power	22W
Luminous Flux	3000lm
Colour Temperature	3000K
IP Rating	IP20
Dimensions	1778 x 28mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-61-33-01	Foxlux Self Test Emergency Kit 5W
NET-50-33-01	Streamer 3H Emergency Kit 4.5W
NET-19-33-17	Liteplan DALI Emergency Kit 5W
NET-55-16-02	LED Tube Replacement Starter

NET LED Lighting


 Buckingham Business Park, 300 Anderson Road,
 Swavesey, Cambridge, CB24 4UQ

 T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

ORDER BY 6PM
 FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	85-265V
Power Factor	>0.95
Luminaire Efficacy	130lm/W
LED Manufacturer	Sanan
LED Type	SMD 2835
Driver Manufacturer	Wiscoon Tech Co. Ltd
Driver Output Voltage (DC)	50-80V
Total Circuit Power (w)	22W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	-15°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	22
Weight	0.50Kg
Manufacturer	Wiscoon Tech Co. Ltd.
Fire Rating	V2
Luminous Flux Factor	18.18%
Housing Colour	White
Housing Material	Aluminium
Diffuser Material	Polycarbonate



Other Options

Description	
NET-55-02-01	Carlton T8 Tube 5500K 600mm (2ft) 8W
NET-55-02-02	Carlton T8 Tube 5500K 900mm (3ft) 9W
NET-55-02-03	Carlton T8 Tube 5500K 1200mm (4ft) 15W
NET-55-02-13	Carlton T8 Tube 3000K 1500mm (5ft) 16W
NET-55-02-04	Carlton T8 Tube 5500K 1500mm (5ft) 16W
NET-55-02-15	Carlton T8 Tube 3000K 1800mm (6ft) 22W
NET-55-02-05	Carlton T8 Tube 5500K 1800mm (6ft) 22W
NET-55-02-07	Carlton T8 Tube 4000K 1500mm (5ft) 16W
NET-55-02-09	Carlton T8 Tube 4000K 1800mm (6ft) 22W

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

4K 5.5K


4K 5.5K

4000K AND 5500K COLOUR TEMPERATURES AVAILABLE

Can be used for a variety of applications from commercial and retail spaces to residential environments

4000K AND 5500K COLOUR TEMPERATURES AVAILABLE

Can be used for a variety of applications from commercial and retail spaces to residential environments

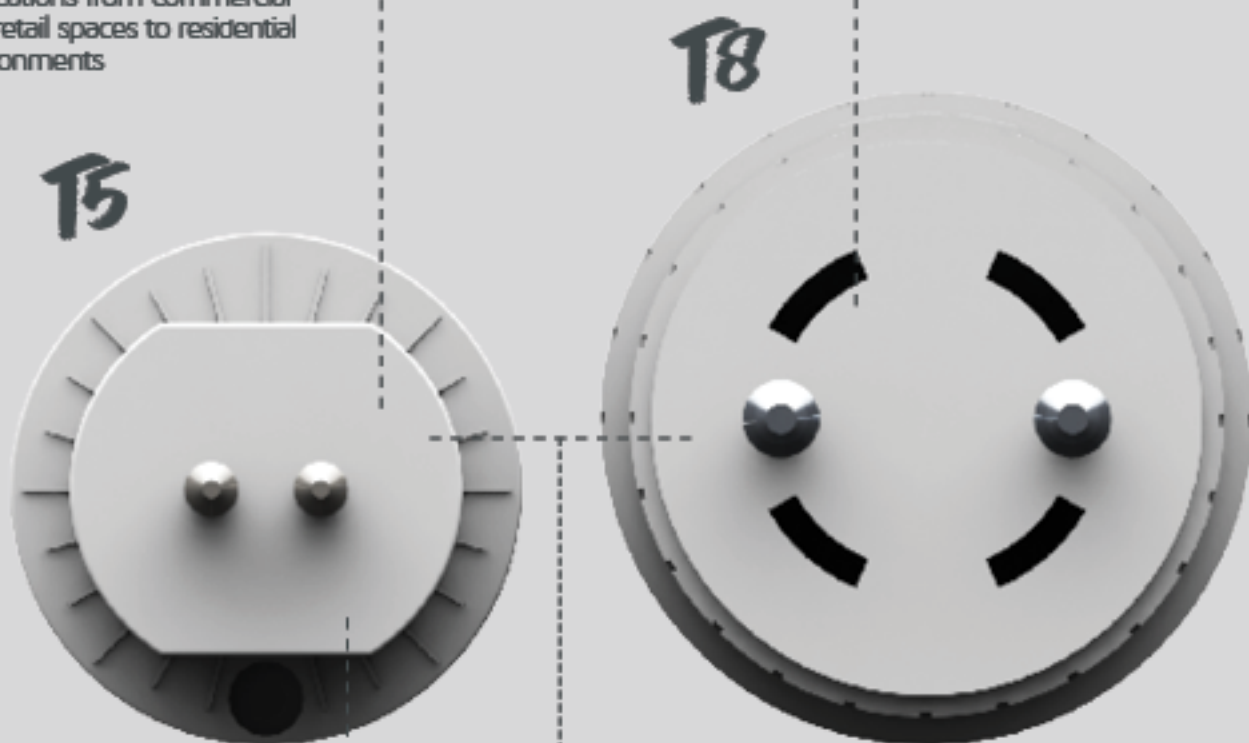

DALI DIMMABLE DRIVER OPTIONS AVAILABLE

Customise lighting levels and reduce electricity consumption

DALI options only

ROTATABLE END CAPS

Direct the light exactly where it's needed